




Diagram

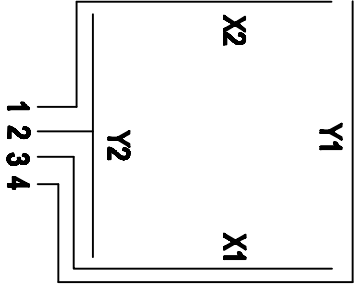

Pin #	Assignment
1	X2
2	Y2
3	X1
4	Y1

Notes:

1. Type: Film to Film
2. Operating Voltage: $\leq 10V$
3. Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
4. Life Time: 1,000,000 times
5. Connect Material: FPC
6. Response Time: $\leq 10ms$
7. Linearity: $\leq 1.5\%$
8. Transmittance: $\geq 75\%$
9. Surface Hardness $\geq 3H$ (pencil)
10. Operation force: $60g \sim 150g$
11. Resistance: X: $450\Omega \sim 1100\Omega$ Y: $162\Omega \sim 396\Omega$

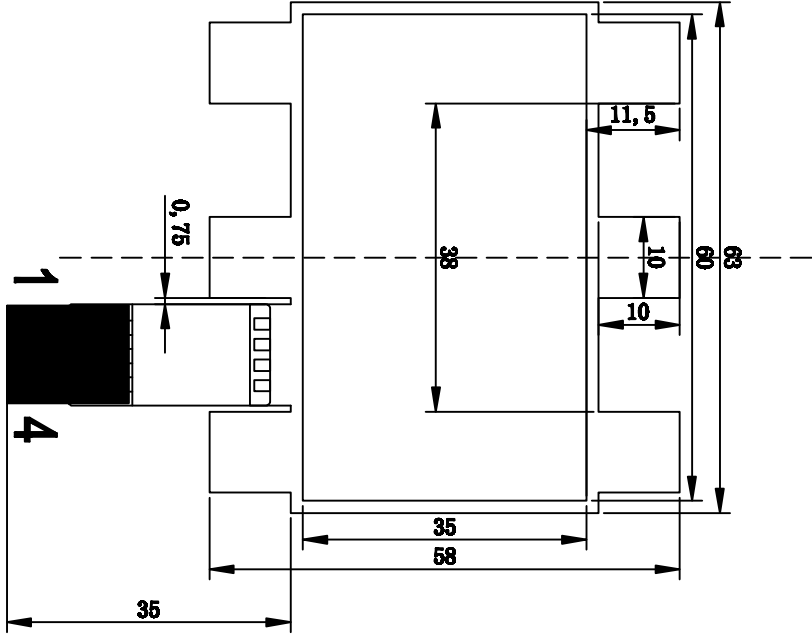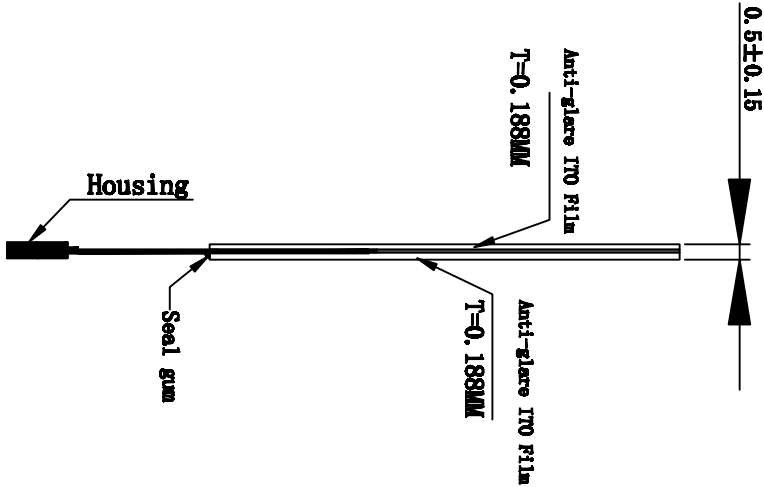

GreenTouch

Shenzhen GreenTouch Technology Co., Ltd

Model No.:	GT-41V-2-7E-1	Size	2.7"	Ratio	4:3
Structure	F+T	Unit	mm	Scale	1:1
Design	李俊	Date	2016.3.9	Page	1/1
Check	付广宇	Date	2016.3.9	Version	A0
Released	张强	Date	2016.3.9		

TOLERANCES (UNLESS OTHERWISE STATED)		
DIMENSIONS	ANGLES	FINISH
1000+ X 0.000MM	±1.50MM	±0.00MM
1200+ X 0.000MM	±0.25MM	±0.00MM
800+ X 0.000MM	±0.25MM	±0.00MM
400+ X 0.000MM	±0.25MM	±0.00MM
120+ X 0.000MM	±0.25MM	±0.00MM
30+ X 0.000MM	±0.25MM	±0.00MM
<25MM	±0.10MM	±0.00MM

版本

变更原因

日期

姓名