
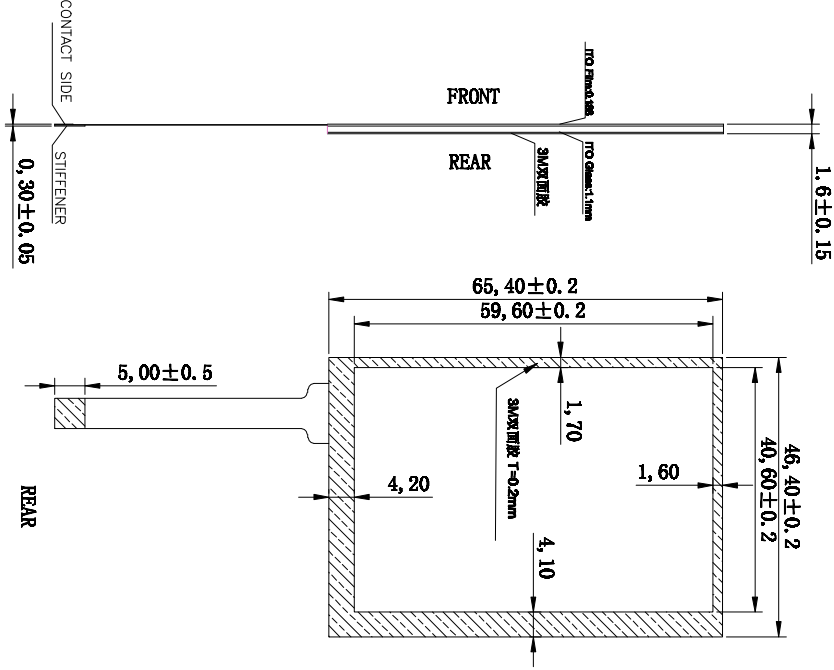


Diagram

Pin No.	Symbol
1	YU
2	XL
3	YD
4	XR

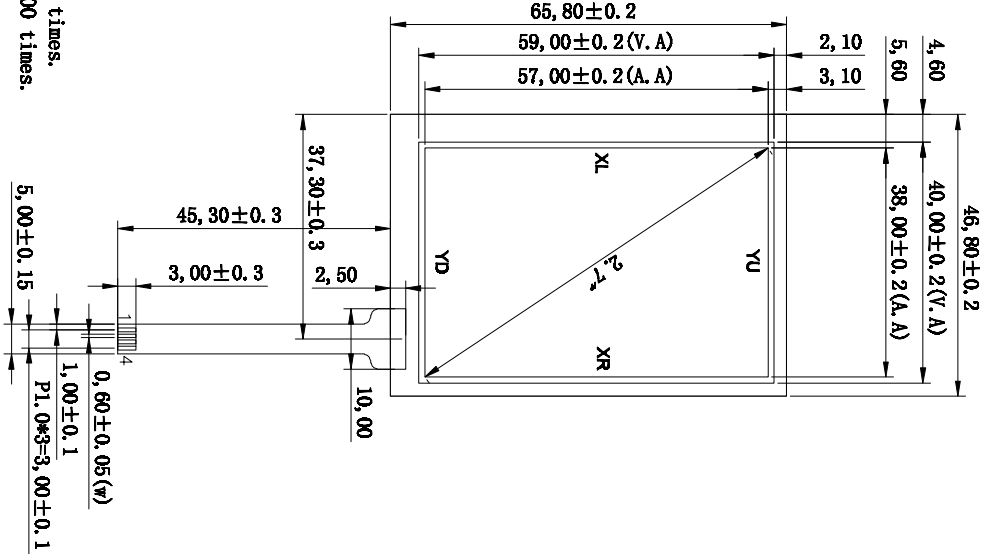

- NOTES:
1. Type: Film to Glass, anti-glare
 1. Operation Temperature: -20°C ~ $+70^{\circ}\text{C}$.
 - Storage Temperature: -30°C ~ $+80^{\circ}\text{C}$.
 - Life Time (Tapping durability): $>1,000,000$ times.
 - Life Time (Pen sliding durability): $>100,000$ times.
 - Linearity: $\leq 1.5\%$.
 4. TOP ITO Film: Anti-Glare film
 - Loop Resistance: $100 < X < 400$; $450 < Y < 950$;
 5. Unspecified Tolerance: ± 0.20
 6. Tail type: FPC with golden plated
 7. Transmittance: $\geq 78\%$
 - Surface hardness: 3H Chattering time: $\leq 10\text{ms}$
 8. ROHS
 9. Neutral product
 10. FPC 镀金压延铜

版本	变更原因	日期	姓名
----	------	----	----

GreenTouch

绿域触控

Shenzhen GreenTouch Technology Co., Ltd

Model No.:

GT-4W-27B-1

Structure

Mr. Li

Design

Pay for wei

Release

Wang Chen

Size

2.7"

Unit

mm

Date

2018.8.23

Version

A0

TOLERANCES
(UNLESS OTHERWISE STATED)

DECIMALS ANGLES

± 0.05

1800 < X < 2000MM

$\pm 1.20\text{MM}$

1200 < X < 1800MM

$\pm 0.80\text{MM}$

800 < X < 1200MM

$\pm 0.50\text{MM}$

400 < X < 800MM

$\pm 0.40\text{MM}$

120 < X < 400MM

$\pm 0.20\text{MM}$

30 < X < 120MM

$\pm 0.10\text{MM}$

Model No.:

GT-4W-27B-1

Structure

Mr. Li

Design

Pay for wei

Release

Wang Chen

Size

2.7"

Unit

mm

Date

2018.8.23

Version

A0

TOLERANCES
(UNLESS OTHERWISE STATED)

DECIMALS ANGLES

± 0.05

1800 < X < 2000MM

$\pm 1.20\text{MM}$

1200 < X < 1800MM

$\pm 0.80\text{MM}$

800 < X < 1200MM

$\pm 0.50\text{MM}$

400 < X < 800MM

$\pm 0.40\text{MM}$

120 < X < 400MM

$\pm 0.20\text{MM}$

30 < X < 120MM

$\pm 0.10\text{MM}$