


Logic:



Notes:



- 1.Type:Film to Glass
- 2.Operating Voltage:≤10v
- 3.Operation Temperature:

-20°C ~ 65°C

Storage Temperature:

-30°C ~ 70°C

4. Life Time:1,000,000 times
 5. Connect Material:FPC
 6. Response Time:≤10ms
 7. Linearity:≤1.5%
 8. Transmittance:≥75%
 9. Surface Hardness≥3H(pencil)
 10. Operation force:60g~150g
 11. Resistance:
- X:100Ω-243Ω Y:733Ω-1792Ω

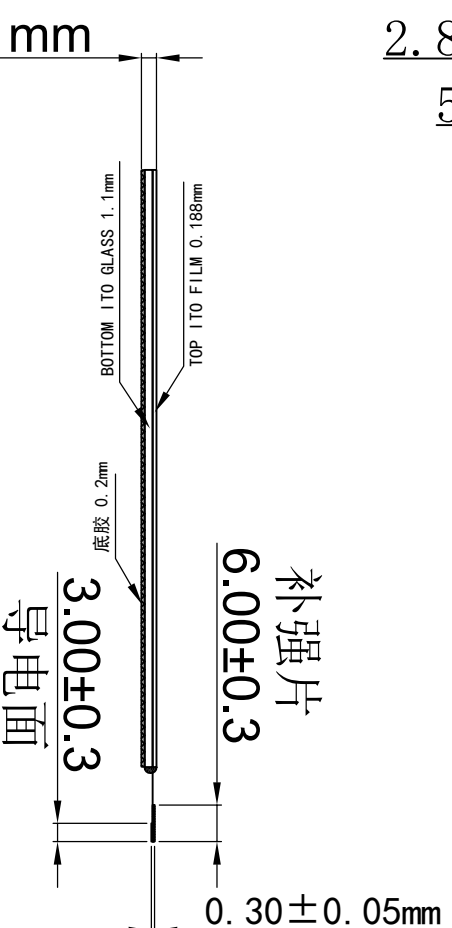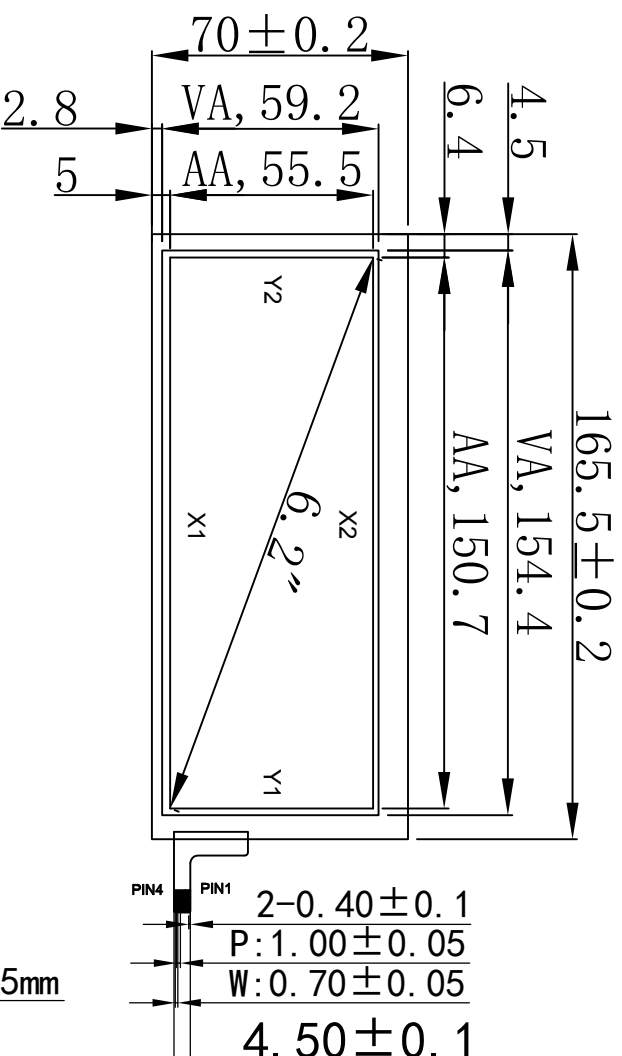

TOLERANCES (UNLESS OTHERWISE STATED) DECIMALS ANGLES ±0.59°		 GreenTouch®		GreenTouch Technology Co., Ltd	
1600< X ≤2000MM 1200< X ≤1600MM 800< X ≤1200MM 400< X ≤800MM 120< X ≤400MM 30< X ≤120MM <30MM		±1.20MM ±0.80MM ±0.50MM ±0.40MM ±0.30MM ±0.20MM ±0.10MM			
Model No.:		GT-4W-6-2A-1		Size	
Structure		G+F		Unit	
Design		李俊		Date	
Check		付作书		Date	
Release				Date	
				2015.8.5	
				Version	
				16:9	
				1:1	
				1/1	
				A0	
					