



版本	变更原因	日期	姓名

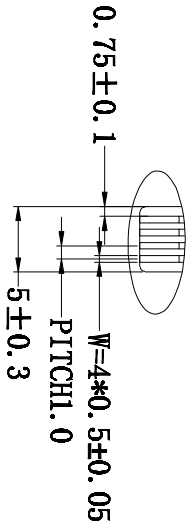

PIN #	Assignment
1	Y-
2	X-
3	Y+
4	X+

Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10v
- 3.Operation Temperature:-10℃~60℃
Storage Temperature:-20℃~70℃
- 4.Life Time:1.000.000 times
- 5.Connect Material:FPC
- 6.Response Time:≤10ms
- 7.Linearity:≤1.5%
- 8.Transmittance:≥75%
- 9.Surface Hardness≥3H(pencil)
- 10.Operation force:60g~150g
- 11.Resistance:X:450Ω~1100Ω Y:162Ω-396Ω

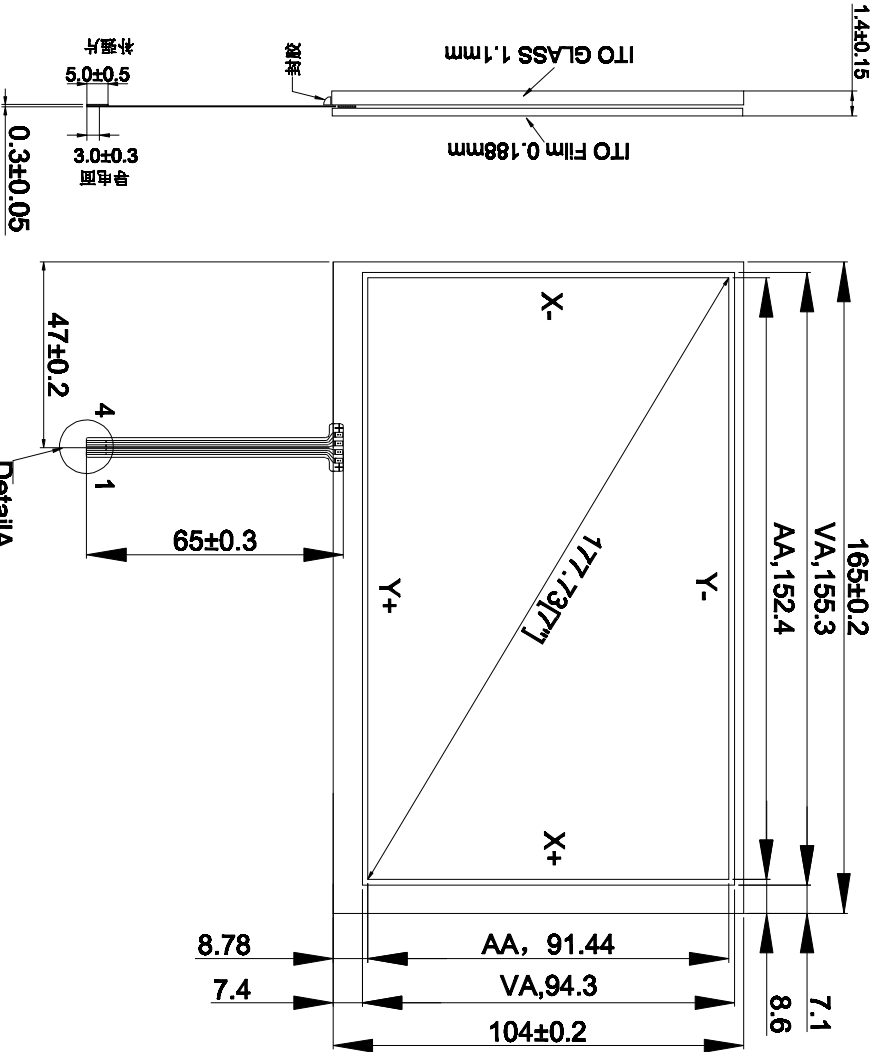

TOLERANCES (UNLESS OTHERWISE STATED) DECIMALS ANGLES ±0.5%			
1600< X ≤2000MM	±1.20MM	1600< X ≤2000MM	±1.20MM
1200< X ≤1600MM	±0.80MM	1200< X ≤1600MM	±0.80MM
800< X ≤1200MM	±0.50MM	800< X ≤1200MM	±0.50MM
400< X ≤800MM	±0.40MM	400< X ≤800MM	±0.40MM
120< X ≤400MM	±0.30MM	120< X ≤400MM	±0.30MM
30< X ≤120MM	±0.20MM	30< X ≤120MM	±0.20MM
<30MM	±0.10MM	<30MM	±0.10MM
GreenTouch		Shenzhen GreenTouch Technology Co.,Ltd	
Model No.:	GT-4W-7B-1	Size	7"II
Structure	G+F	Unit	mm
Design	李俊	Date	2015.8.5
Check	付作书	Date	2015.8.5
Release	王琳	Date	2015.8.5
Ratio	16:9	Scale	1:1
Page	1/1	Version	A0