


版本	变更原因	日期	姓名

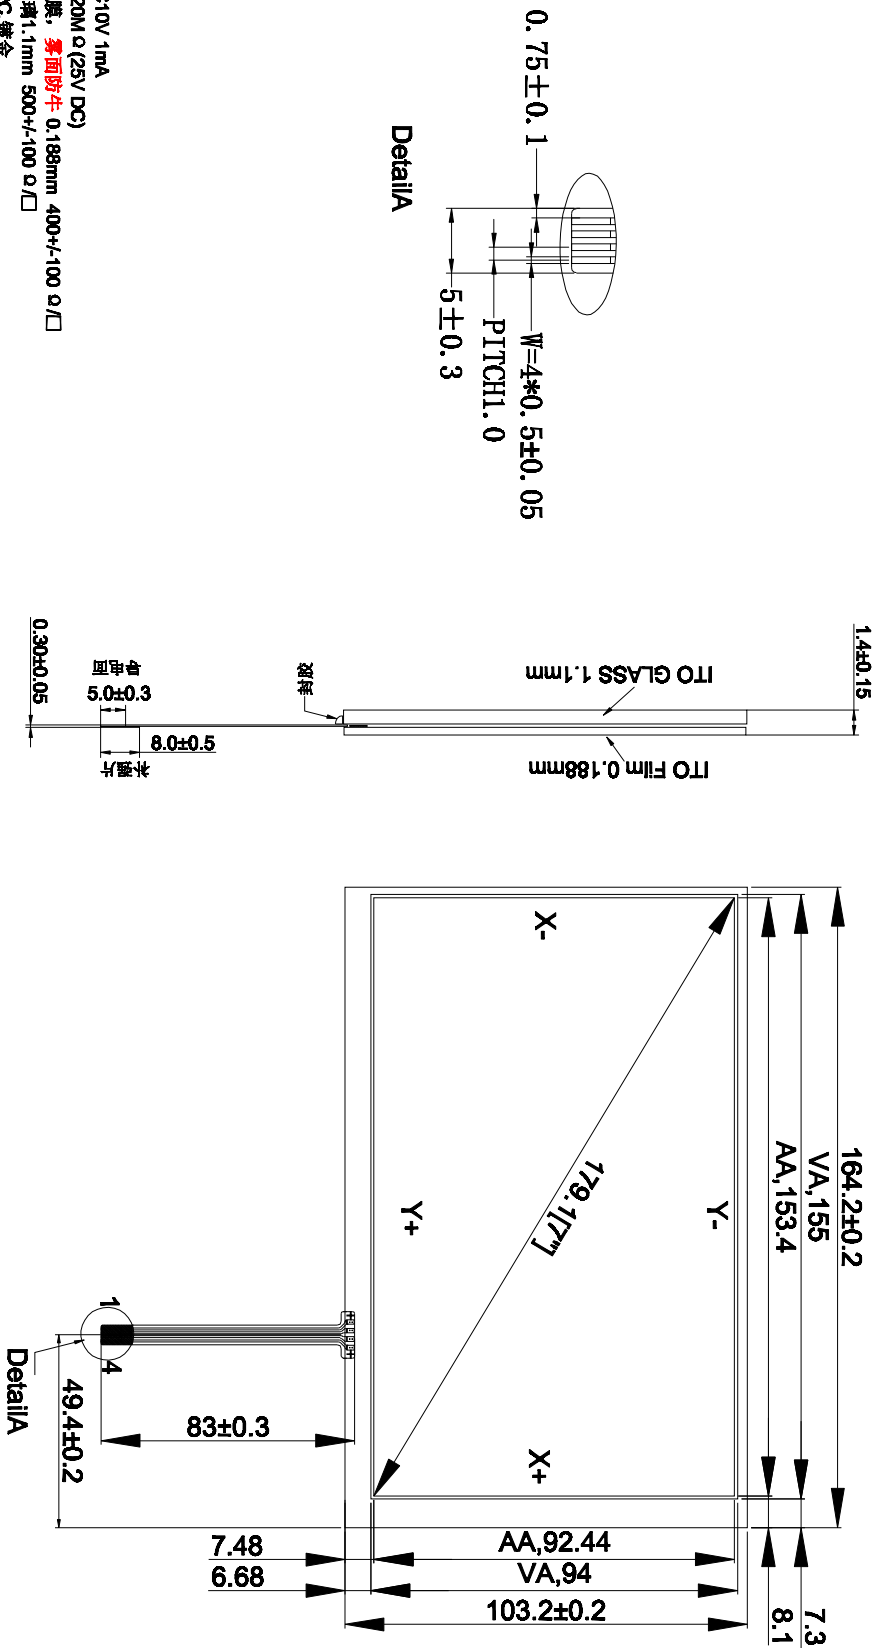

DetailA

- 注释:
- 1.电路等级: DC10V 1mA
 - 2.绝缘阻抗: $\geq 20M\Omega$ (25V DC)
 - 3.上电极: ITO薄膜, 雾面防牛 0.188mm 400 $\pm$ 100 Ω /□
下电极: ITO玻璃1.1mm 500 $\pm$ 100 Ω /□
 - 4.回路电阻: FPC, 镀金
pin2-pin4: 100-500 Ω
pin2-pin4: 400-1100 Ω
 - 5.线性: $\leq 1.5\%$
 - 6.透光率: $\geq 75\%$
 - 7.操作压力: 60-150g
 - 8.触点抖动时间: $< 15ms$
 - 9.使用寿命: 点击: ≥ 100 万次
划键: ≥ 10 万次
 - 10.表面硬度: $\geq 3H$
 - 11.工作条件: -20℃~+70℃
 - 12.储存条件: -30℃~+80℃
 - 13.未注公差按: $\pm 0.2mm$.

PIN #	Assignment
1	Y-
2	X-
3	Y+
4	X+

TOLERANCES
(UNLESS OTHERWISE STATED)

DESCRIPTORS	ANGLES	±0.1%
1000" X 5200MM	±1.20MM	
1200" X 5200MM	±0.50MM	
800" X 5200MM	±0.50MM	
400" X 5200MM	±0.40MM	
30" X 5200MM	±0.20MM	
<30MM	±0.10MM	

GreenTouch

Shenzhen GreenTouch Technology Co., Ltd

Model No.:	Size	Ratio
GT-4W-TC-1	7"	16:9
Structure	G+T	mm
Design	李俊	2015.8.5
Check	付作市	2015.8.5
Release	汪燕	2015.8.5
Page	1/1	
Version	A0	

