




正视图

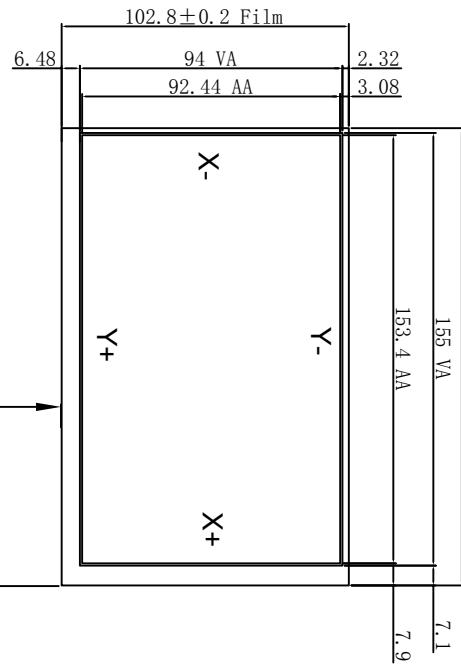

侧视图

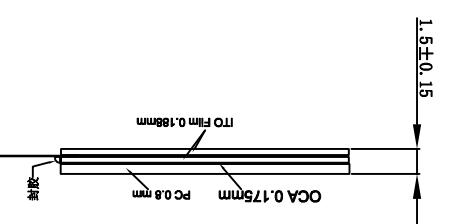

背视图

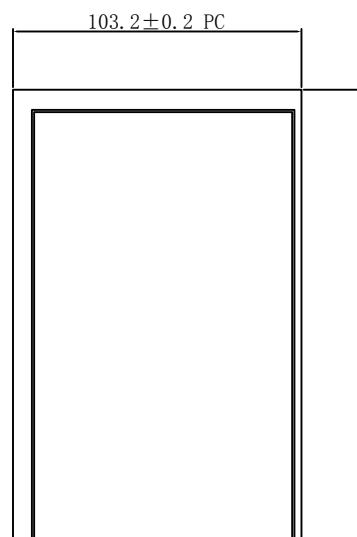

说明:
1.结构: PET+film+glass+tail(FPC)
 film: T=0.188mm(雾面防牛)
 film: T=0.188mm(雾面防牛)
 PC: T=0.8mm
 tail:FPC 4 pin pitch=1.0mm
 Total thickness:1.5±0.15mm.

2.绝缘阻抗: ≥20MΩ(10V DC)

3.电阻: X:400-1100Ω

Y:100-500Ω

4.线性: ≤1.5% ; **透光率:** ≥75%

5.操作压力: 60-150g


6.使用寿命: ≥1000,000次

7.响应时间: ≤10ms

8.工作环境: -10°C~+60°C

9.储存环境: -20°C~+70°C

10.未注尺寸公差±0.2mm

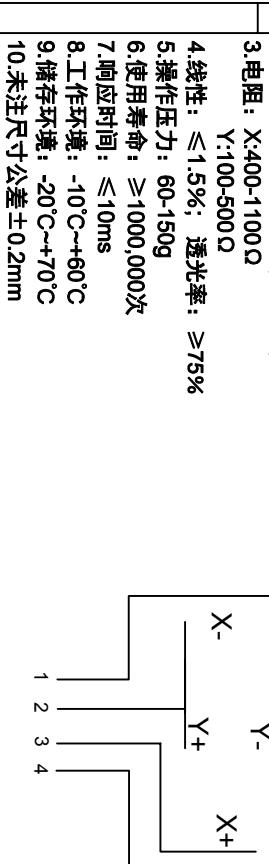

PIN	OUT
1	X-
2	Y+
3	X+
4	Y-

(UNLESS OTHERWISE STATED)		GreenTouch®	Shenzhen GreenTouch Technology Co.,Ltd
DECIMALS	ANGLES		
>2000MM	<2.00MM		
1600< X ≤2000MM	≤1.20MM		
1200< X ≤1600MM	≤0.50MM		
800< X ≤1200MM	≤0.50MM		
400< X ≤800MM	≤0.40MM		
120< X ≤400MM	≤0.30MM		
30< X ≤120MM	≤0.20MM		
<30MM	≤0.10MM		

Model No.:	GT-4W-TC-2	Size	7"	Ratio	1:9
Structure	F+FP	Unit	mm	Scale	1:1
Design		Date	2016.06.07	Page	1/1
Check		Date	2016.06.28	Version	A0
Release		Date	2016.06.28	Release	④