



版本	变更原因	日期	姓名


Front view

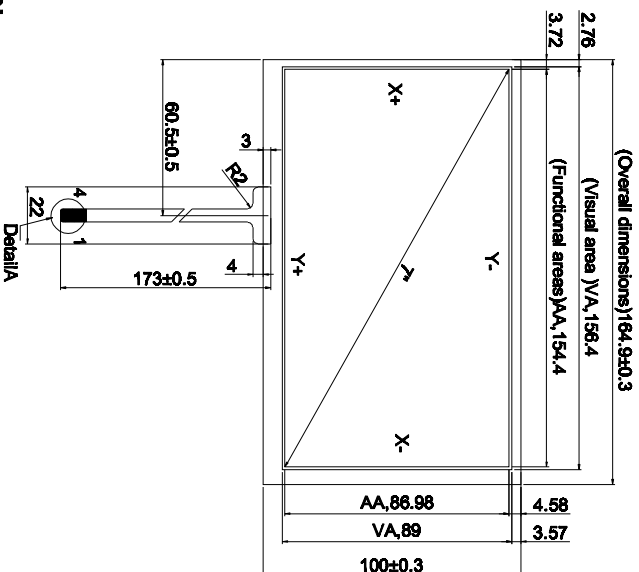

The strokes

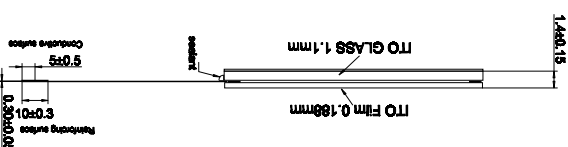


Back view

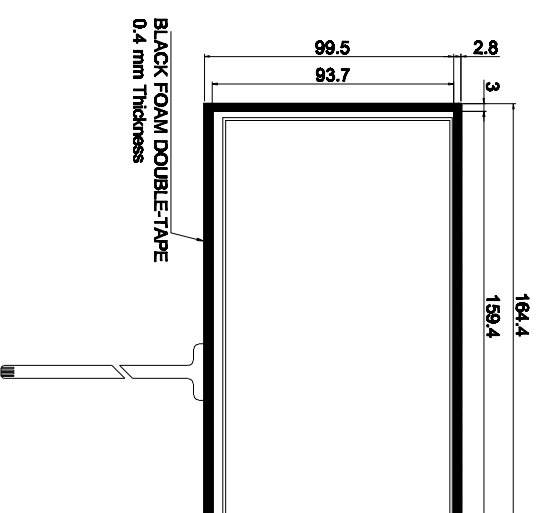

Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10V
- 3.Operation Temperature:-10℃~60℃
Storage Temperature:-20℃~70℃
- 4.Life Time:1,000,000 times
- 5.Connect Material:FPC
- 6.Response Time:≤10ms
- 7.Linearity:≤1.5%
- 8.Transmittance:≥75%
- 9.Surface Hardness≥3H(pencil)
- 10.Operation force:60g~150g
- 11.Resistance:X:479Ω-1172Ω Y:152Ω-372Ω

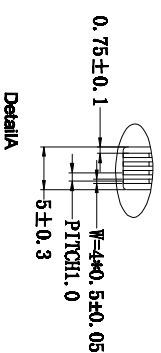

Logic:

PIN #	Assignment
1	Y-
2	X-
3	Y+
4	X+

TOLERANCES (UNLESS OTHERWISE STATED) DIMENSIONS / ANGLES			
>300MM	±2.00MM		±0.5°
100~>300MM	±1.20MM		
1200~>300MM	±0.80MM		
800~>300MM	±0.50MM		
400~>300MM	±0.40MM		
120~>300MM	±0.30MM		
30~>300MM	±0.20MM		
<30MM	±0.10MM		
GreenTouch			
Shenzhen GreenTouch Technology Co., Ltd			
Model No.:	GT-4117C-1	Size	7"II
Structure	Gr-F	Unit	mm
Design	李俊	Date	2016.6.3
Check	付作希	Date	2016.6.3
Release	江燕	Date	2016.6.3
Ratio	16:9	Scale	1:1
Page	1/1	Version	A0