


版本	变更原因	日期	姓名
----	------	----	----



Logic:

Pin	OUT
1	XL
2	YD
3	XR
4	YU



Notes:

- 1.Type:film+glass+tail
- 2.Operating Voltage:≤10v
- 3.Operation Temperature:-20℃~70℃
Storage Temperature:-40℃~80℃
- 4.Life Time:1.000.000 times
- 5.Connect Material:FFC
- 6.Response Time:≤10ms
- 7.Linearity:≤1.5%
- 8.Transmittance:≥75%
- 9.Surface Hardness≥3H(pencil)
- 10.Operation force:30g~120g
- 11.Resistance:X:483Ω-1182Ω Y:151Ω-369Ω

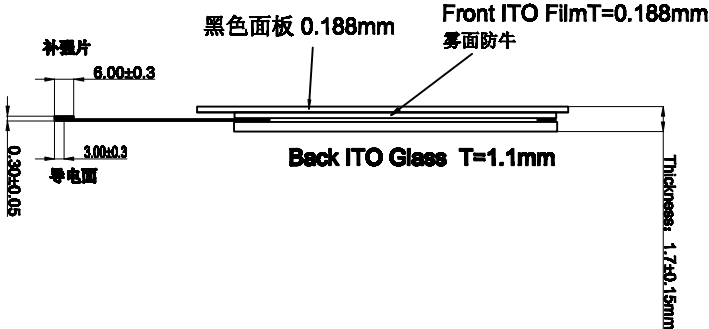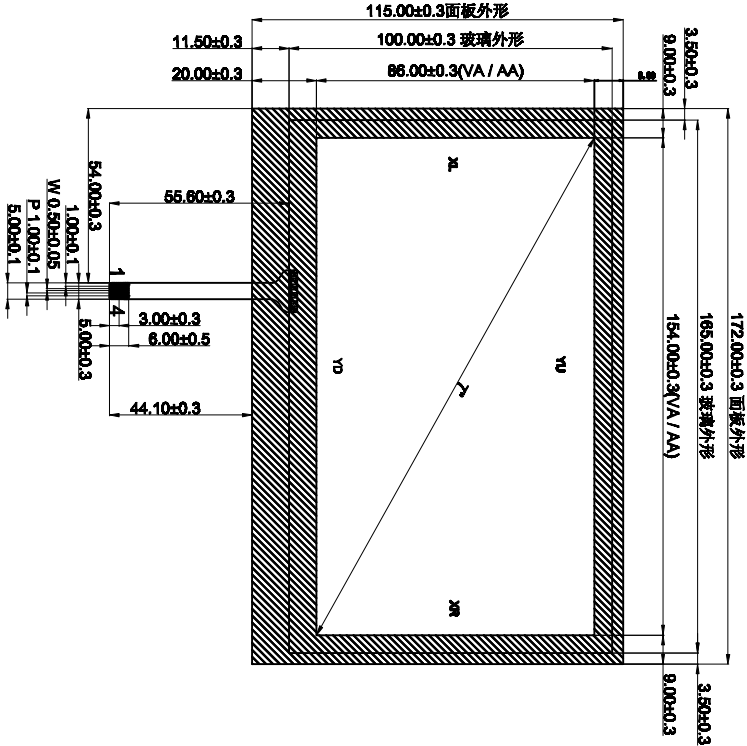

TOLERANCES
(UNLESS OTHERWISE STATED)
DIMENSIONS FINISHES 50.0%

1800-X-5200MM	±1.20MM
1200-X-5180MM	±0.80MM
800-X-5120MM	±0.50MM
400-X-500MM	±0.40MM
120-X-540MM	±0.30MM
30-X-5120MM	±0.20MM
<30MM	±0.10MM

GreenTouch

Shenzhen GreenTouch Technology Co., Ltd

Model No.:	GT-AH-71-1	Size	7"	Ratio	16:9
Structure	GR-FP	Unit	mm	Scale	1:1
Design	李俊	Date	2016.5.16	Page	1/1
Check	付作书	Date	2016.5.16	Version	A0
Release	江燕	Date	2016.5.16		

