
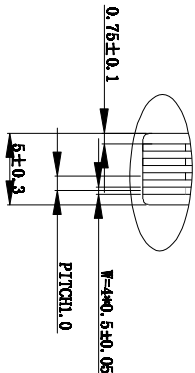


版本	变更原因	日期	姓名


Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10V
- 3.Operation Temperature:-10℃~60℃
Storage Temperature:-20℃~70℃
- 4.Life Time:1,000,000 times
- 5.Connect Material:FPC
- 6.Response Time:≤10ms
- 7.Linearity:≤1.5%
- 8.Transmittance:≥75%
- 9.Surface Hardness≥3H(pencil)
- 10.Operation force:60g ~150g
- 11.Resistance:X:152Ω-372Ω Y:479Ω-1170Ω

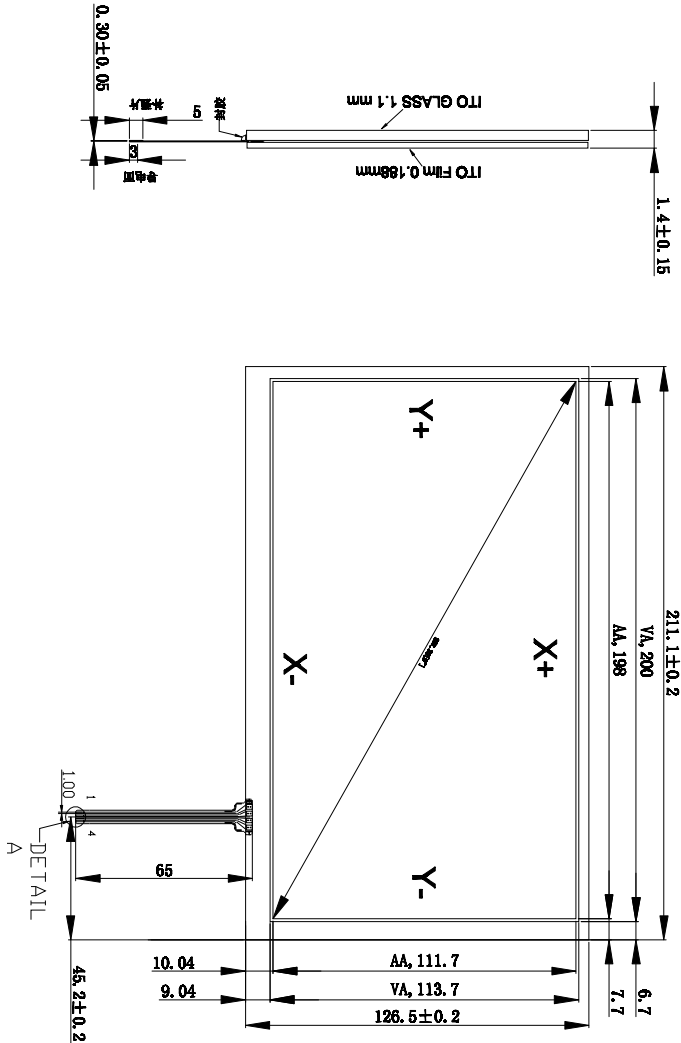

DetailA

PIN #	Assignment
1	Y+
2	X-
3	Y-
4	X+



TOLERANCES (UNLESS OTHERWISE STATED) DIMENSIONS ANGLES ±0.5°		Shenzhen GreenTouch Technology Co.,Ltd	
1600< X ≤2000MM	±1.20MM		
1200< X ≤1600MM	±0.80MM		
800< X ≤1200MM	±0.50MM		
400< X ≤800MM	±0.40MM		
120< X ≤400MM	±0.30MM		
30< X ≤120MM	±0.20MM		
<30MM	±0.10MM		

Model No.:	GT-4W-9A-1	Size	9"	Ratio	16:9
Structure	G+F	Unit	mm	Scale	1:1
Design	李俊	Date	2015.8.5	Page	1/1
Check	付作书	Date	2015.8.5	Version	A0
Release	王强	Date	2015.8.5		

