



版本	变更原因	日期	姓名

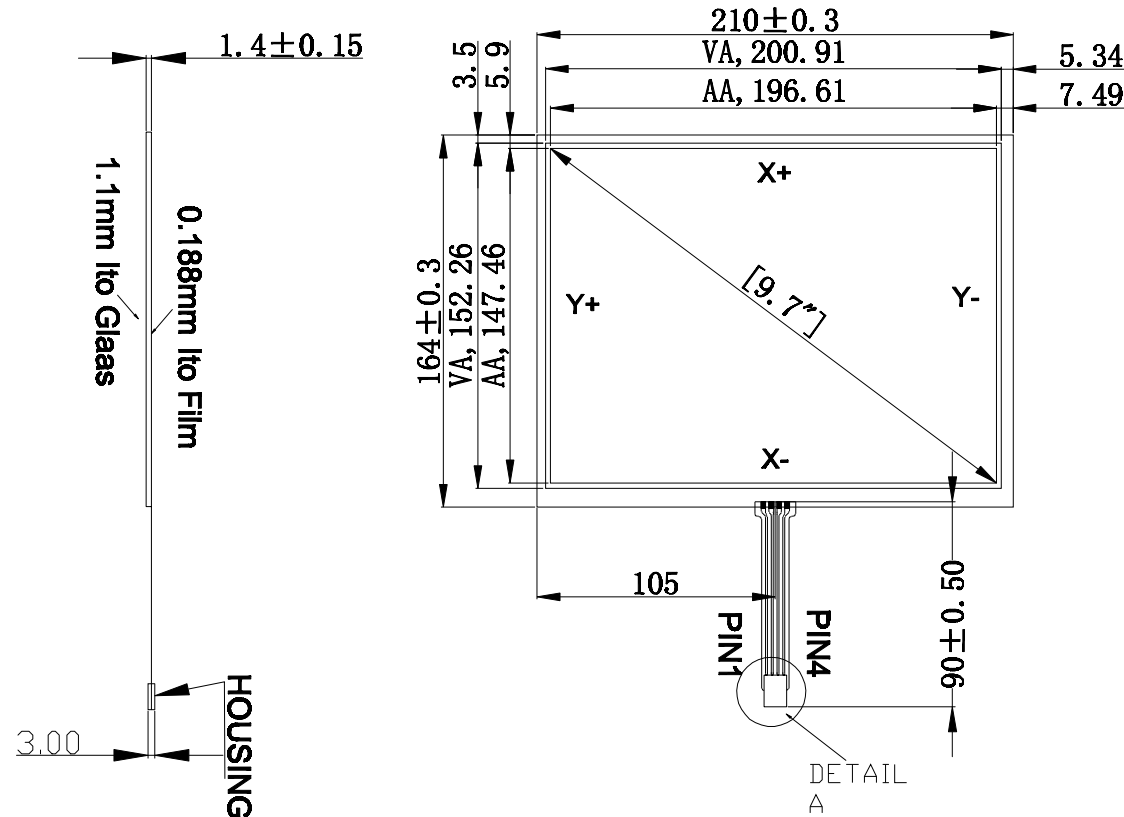


Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10v
- 3.Operation Temperature:-10℃~60℃
Storage Temperature:-20℃~70℃
- 4.Life Time:1.000.000 times
- 5.Connect Material:FPC
- 6.Response Time:≤10ms
- 7.Linearity:≤1.5%
- 8.Transmittance:≥75%
- 9.Surface Hardness≥3H(pencil)
- 10.Operation force:60g~150g
- 11.Resistance:X:203Ω-495Ω Y:360Ω-880Ω



PIN #	Assignment
1	Y+
2	X-
3	Y-
4	X+



TOLERANCES (UNLESS OTHERWISE STATED) DECIMALS ANGLES >200MM ±2.00MM ±0.5° 1600< X ≤200MM ±1.20MM 1200< X ≤1600MM ±0.80MM 800< X ≤1200MM ±0.50MM 400< X ≤800MM ±0.40MM 120< X ≤400MM ±0.30MM 30< X ≤120MM ±0.20MM <30MM ±0.10MM		格林触控 GreenTouch® Shenzhen GreenTouch Technology Co.,Ltd			
Model No.:	GT-4W-9.7A-1	Size	9.7"	Ratio	4:3
Structure	G+F	Unit	mm	Scale	1:1
Design	李俊	Date	2015.8.5	Page	1/1
Check	付作书	Date	2015.8.5	Version	A0
Release	汪露	Date	2015.8.5		