



| 标示 | 更改内容 | 签名 | 日期 |
|----|------|----|----|
|    |      |    |    |

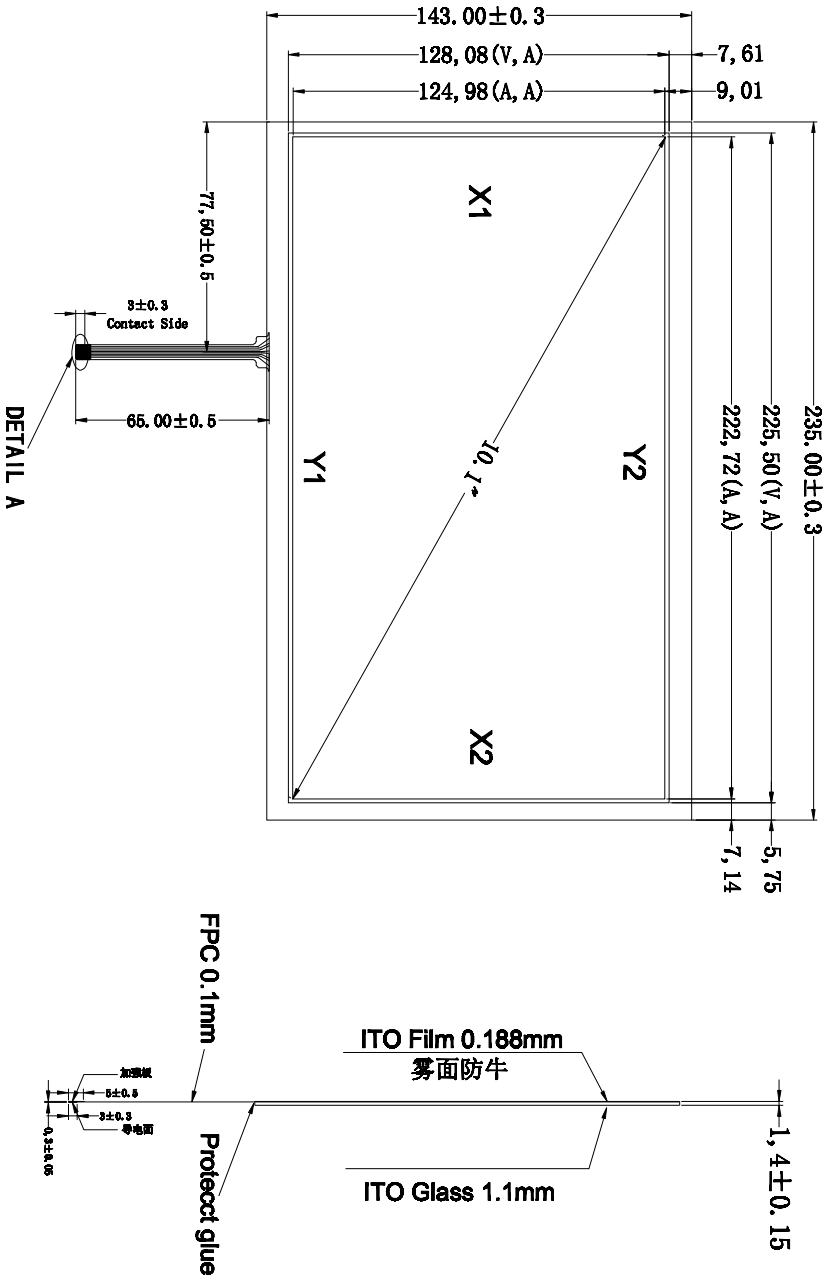

- Notes:
- 1.Type:ITO Glass+ITO Film+FPC
  - 2.Operating Voltage: $\leq 10V$
  - 3.Operation Temperature:  $-10^{\circ}\sim 50^{\circ}$   
Storage Temperature:  $-30^{\circ}\sim 80^{\circ}$
  - 4.Life Time: $>1,000,000$  times
  - 5.Connect Material:FPC
  - 6.Response Time:  $\leq 10ms$
  - 7.Linearity:  $\leq 1.5\%$
  - 8.Transmittance:  $\geq 76\%$
  - 9.Surface Hardness:  $\geq 3H$ (pencil)
  - 10.Operation force:  $20g\sim 150g$
  - 11.Resistance:X:  $481\Omega\sim 1176\Omega$   
Y:  $152\Omega\sim 370\Omega$

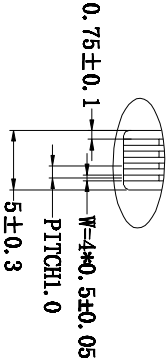

DetailA

| PIN | OUT | Contact Side |
|-----|-----|--------------|
| 1   | X1  |              |
| 2   | Y1  |              |
| 3   | X2  |              |
| 4   | Y2  |              |

(UNLESS OTHERWISE STATED)  
DIMENSIONS ARE IN MILLIMETERS  
TOLERANCES ANGLES

|                      |             |
|----------------------|-------------|
| $>200MM$             | $\pm 2.0MM$ |
| $100 < X \leq 200MM$ | $\pm 1.2MM$ |
| $80 < X \leq 100MM$  | $\pm 0.8MM$ |
| $40 < X \leq 80MM$   | $\pm 0.4MM$ |
| $20 < X \leq 40MM$   | $\pm 0.2MM$ |
| $5 < X \leq 20MM$    | $\pm 0.1MM$ |

GreenTouch

Shenzhen GreenTouch Technology Co.,Ltd

| Model No.:   | Size     | Ratio   |
|--------------|----------|---------|
| GT-4V-101A-1 | 10.1"    | 16:9    |
| Structure    | Unit     | Scale   |
| G+T          | mm       | 1:1     |
| Design       | Date     | Page    |
| 李俊           | 2015.5.5 | 1/1     |
| Check        | Date     | Version |
| 林林           | 2015.5.5 | A0      |
| Release      | Date     |         |
| 王林           | 2015.5.5 |         |

