


2.3±0.15
0.16mm Ito Film
1.8mm Ito Glass

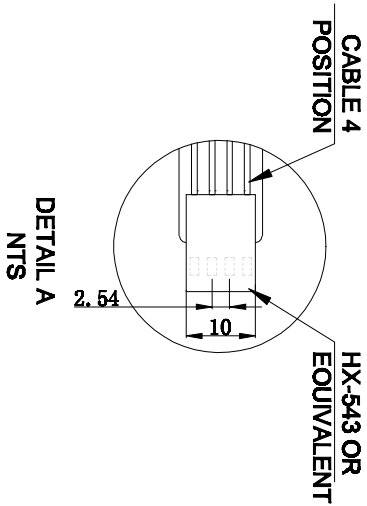

- Notes:
- 1.Type:Film to Glass
 - 2.Operating Voltage:≤10V
 3. Operation Temperature:-20℃~65℃
Storage Temperature:-30℃~70℃
 - 4.Life Time:1,000,000 times
 - 5.Connect Material:FPC
 - 6.Response Time:≤10ms
 - 7.Linearity:≤1.5%
 8. Transmittance:≥75%
 - 9.Surface Hardness≥3H(pencil)
 - 10.Operation force:60g~150g
 - 11.Resistance:X:152Ω-371Ω Y:480Ω-1174Ω

TOLERANCES
(UNLESS OTHERWISE STATED)

DECIMALS	ANGLES	±0.5%
1600< X < 2500MM	>20.0MM	±2.0MM
1200< X < 1700MM	±1.2MM	±1.2MM
800< X < 1100MM	±0.8MM	±0.8MM
400< X < 800MM	±0.4MM	±0.4MM
130< X < 400MM	±0.3MM	±0.3MM
30< X < 120MM	±0.2MM	±0.1MM

GreenTouch		GreenTouch Technology Co.,Ltd	
Model No:	GT-4H-1404-1	Size	14"
Structure	DIY	Unit	mm
Design	张松	Date	2017.2.25
Check	张作书	Date	2017.2.25
Released	张松	Date	2017.2.25
Part No.		Page	1/1
Version		Page	1/1
		Version	A0