




### 正视图

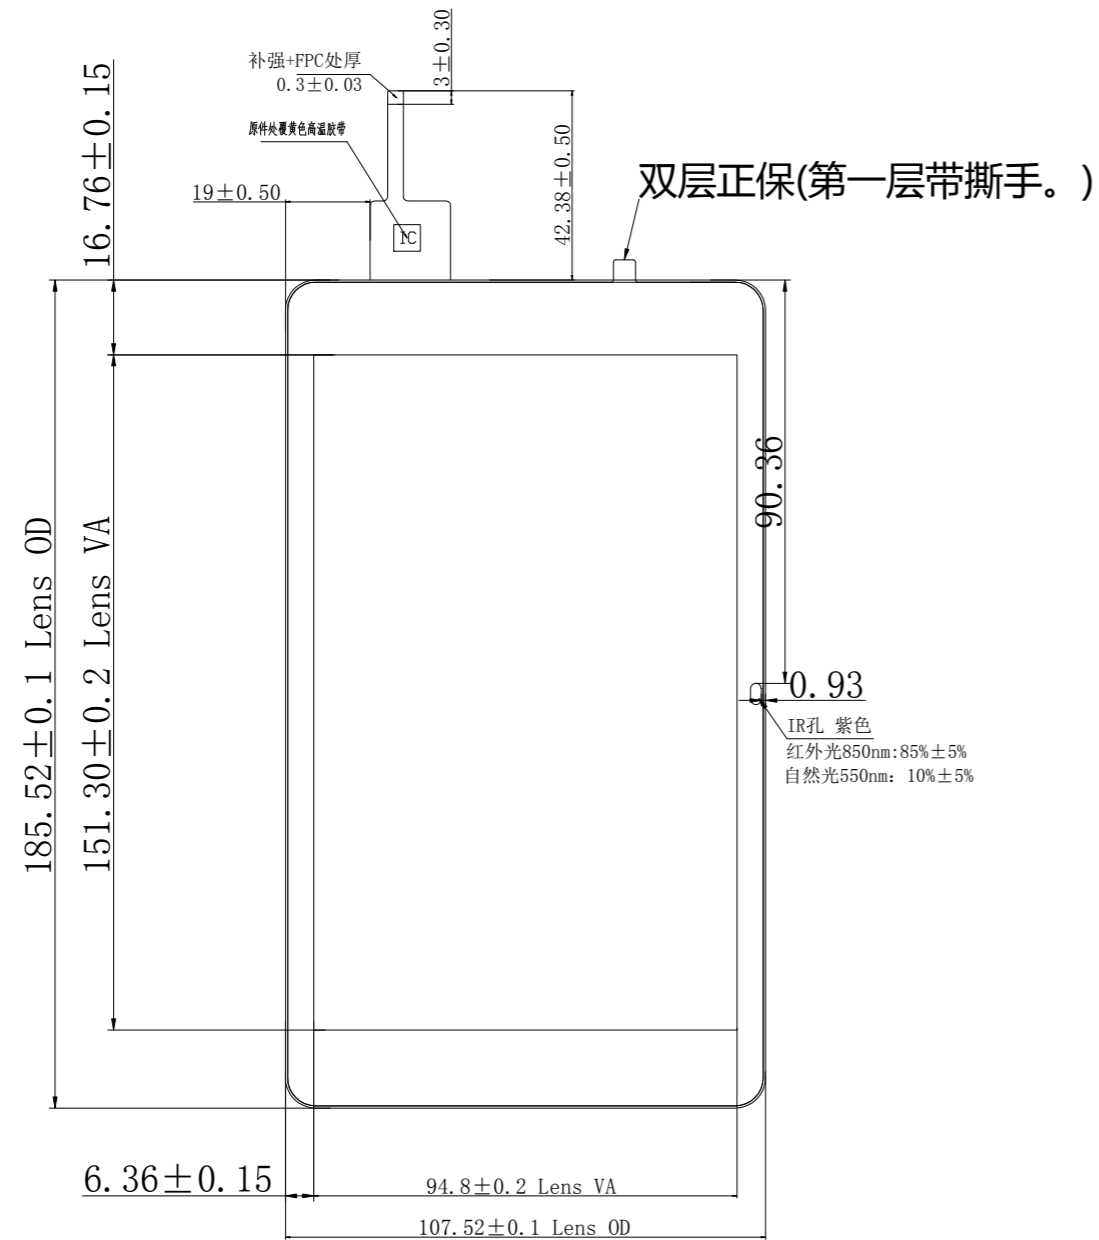

### 侧视图

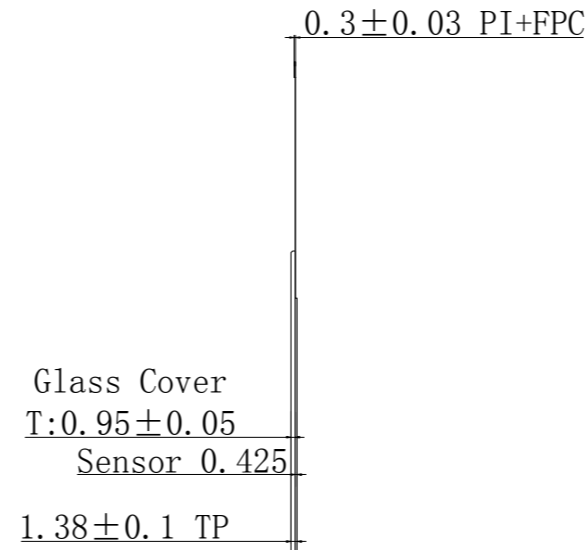

### 背视图

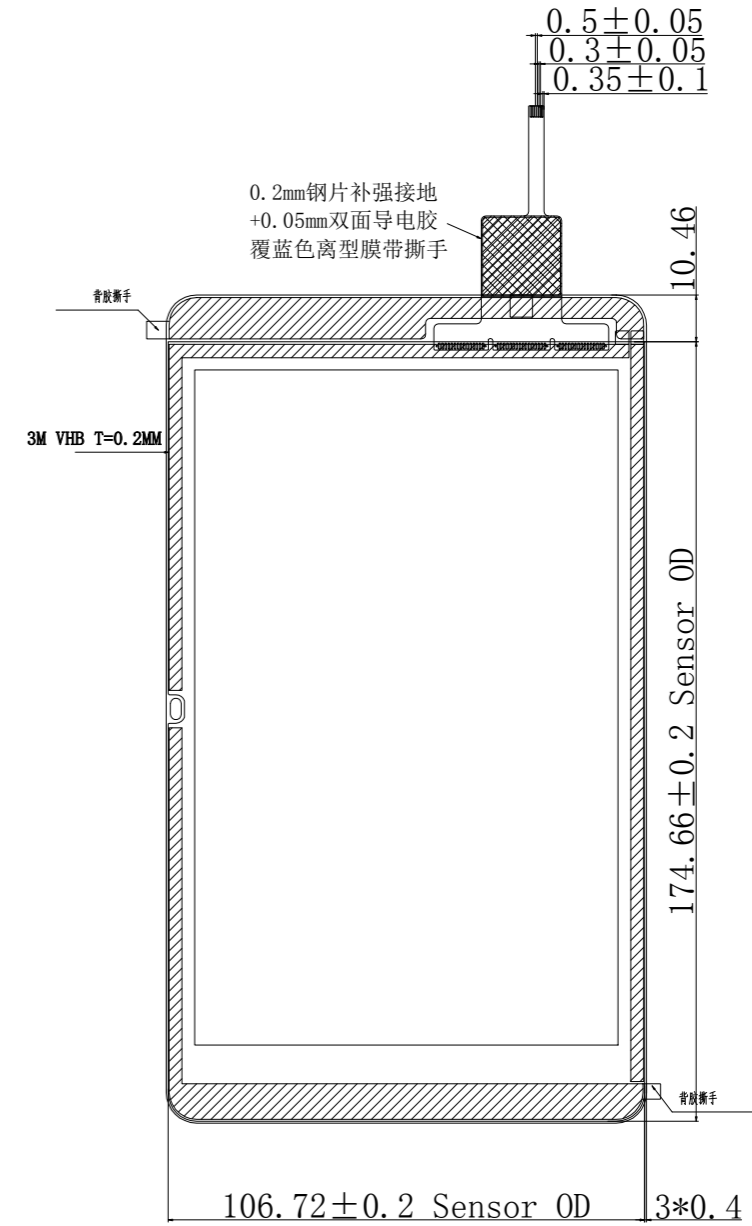

- 技术要求:
- 1.结构 : G+FF(多点)
  - 2.强化参数:CS≥450MPa,DOL≥9um;
  - 3.落球标准:130g钢球、30cm高度、中心点三次,无破碎。
  - 4.油墨达因值:≥32
  - 5.TP表面油墨附着力要求 : 4B;
  - 6.TP翘曲度:≤0.3mm
  - 7.未注倒边:C=0.15\*0.15 ; 未注公差:±0.3
  - 8.环保符合RoHS和REACH要求 ;
  - 9.带\*[]标注是CPK管控尺寸;  
公差≤0.05 CPK≥0.8  
0.05<公差≤0.1 CPK≥0.9  
公差>0.1 CPK≥1.33

通道数: RX14\*TX26

| Property              | Requirement |
|-----------------------|-------------|
| IC                    | GT911       |
| Glass Thickness       | 0.95(旭硝子)   |
| Sensor Thickness      | 0.425       |
| Surface Hardness      | 6H(750g)    |
| Light Transmission    | ≥85%        |
| Operating Temperature | -20~70℃     |
| Storage Temperature   | -30~80℃     |
| Operating Humidity    | 45~85%RH    |
| Storage Humidity      | 45~95%RH    |

TOLERANCES  
(UNLESS OTHERWISE STATED)

| DECIMALS        | ANGLES  |
|-----------------|---------|
| >2000MM         | ±0.5°   |
| 1600< X ≤2000MM | ±2.00MM |
| 1200< X ≤1600MM | ±1.20MM |
| 800< X ≤1200MM  | ±0.80MM |
| 400< X ≤800MM   | ±0.50MM |
| 120< X ≤400MM   | ±0.40MM |
| 30< X ≤120MM    | ±0.30MM |
| <30MM           | ±0.20MM |
|                 | ±0.10MM |

**格林触控**  
**GreenTouch**

Shenzhen GreenTouch Technology Co.,Ltd

|             |                |      |            |         |     |
|-------------|----------------|------|------------|---------|-----|
| Model No. : | GT-CTP-G7.0F-1 | Size | 7.0"       | Ratio   |     |
| Structure   |                | Unit | mm         | Scale   | 1:1 |
| Design      |                | Date | 2025.08.18 | Page    | 1/1 |
| Check       |                | Date | 2025.08.18 | Version | A0  |
| Release     |                | Date | 2025.08.18 |         |     |