
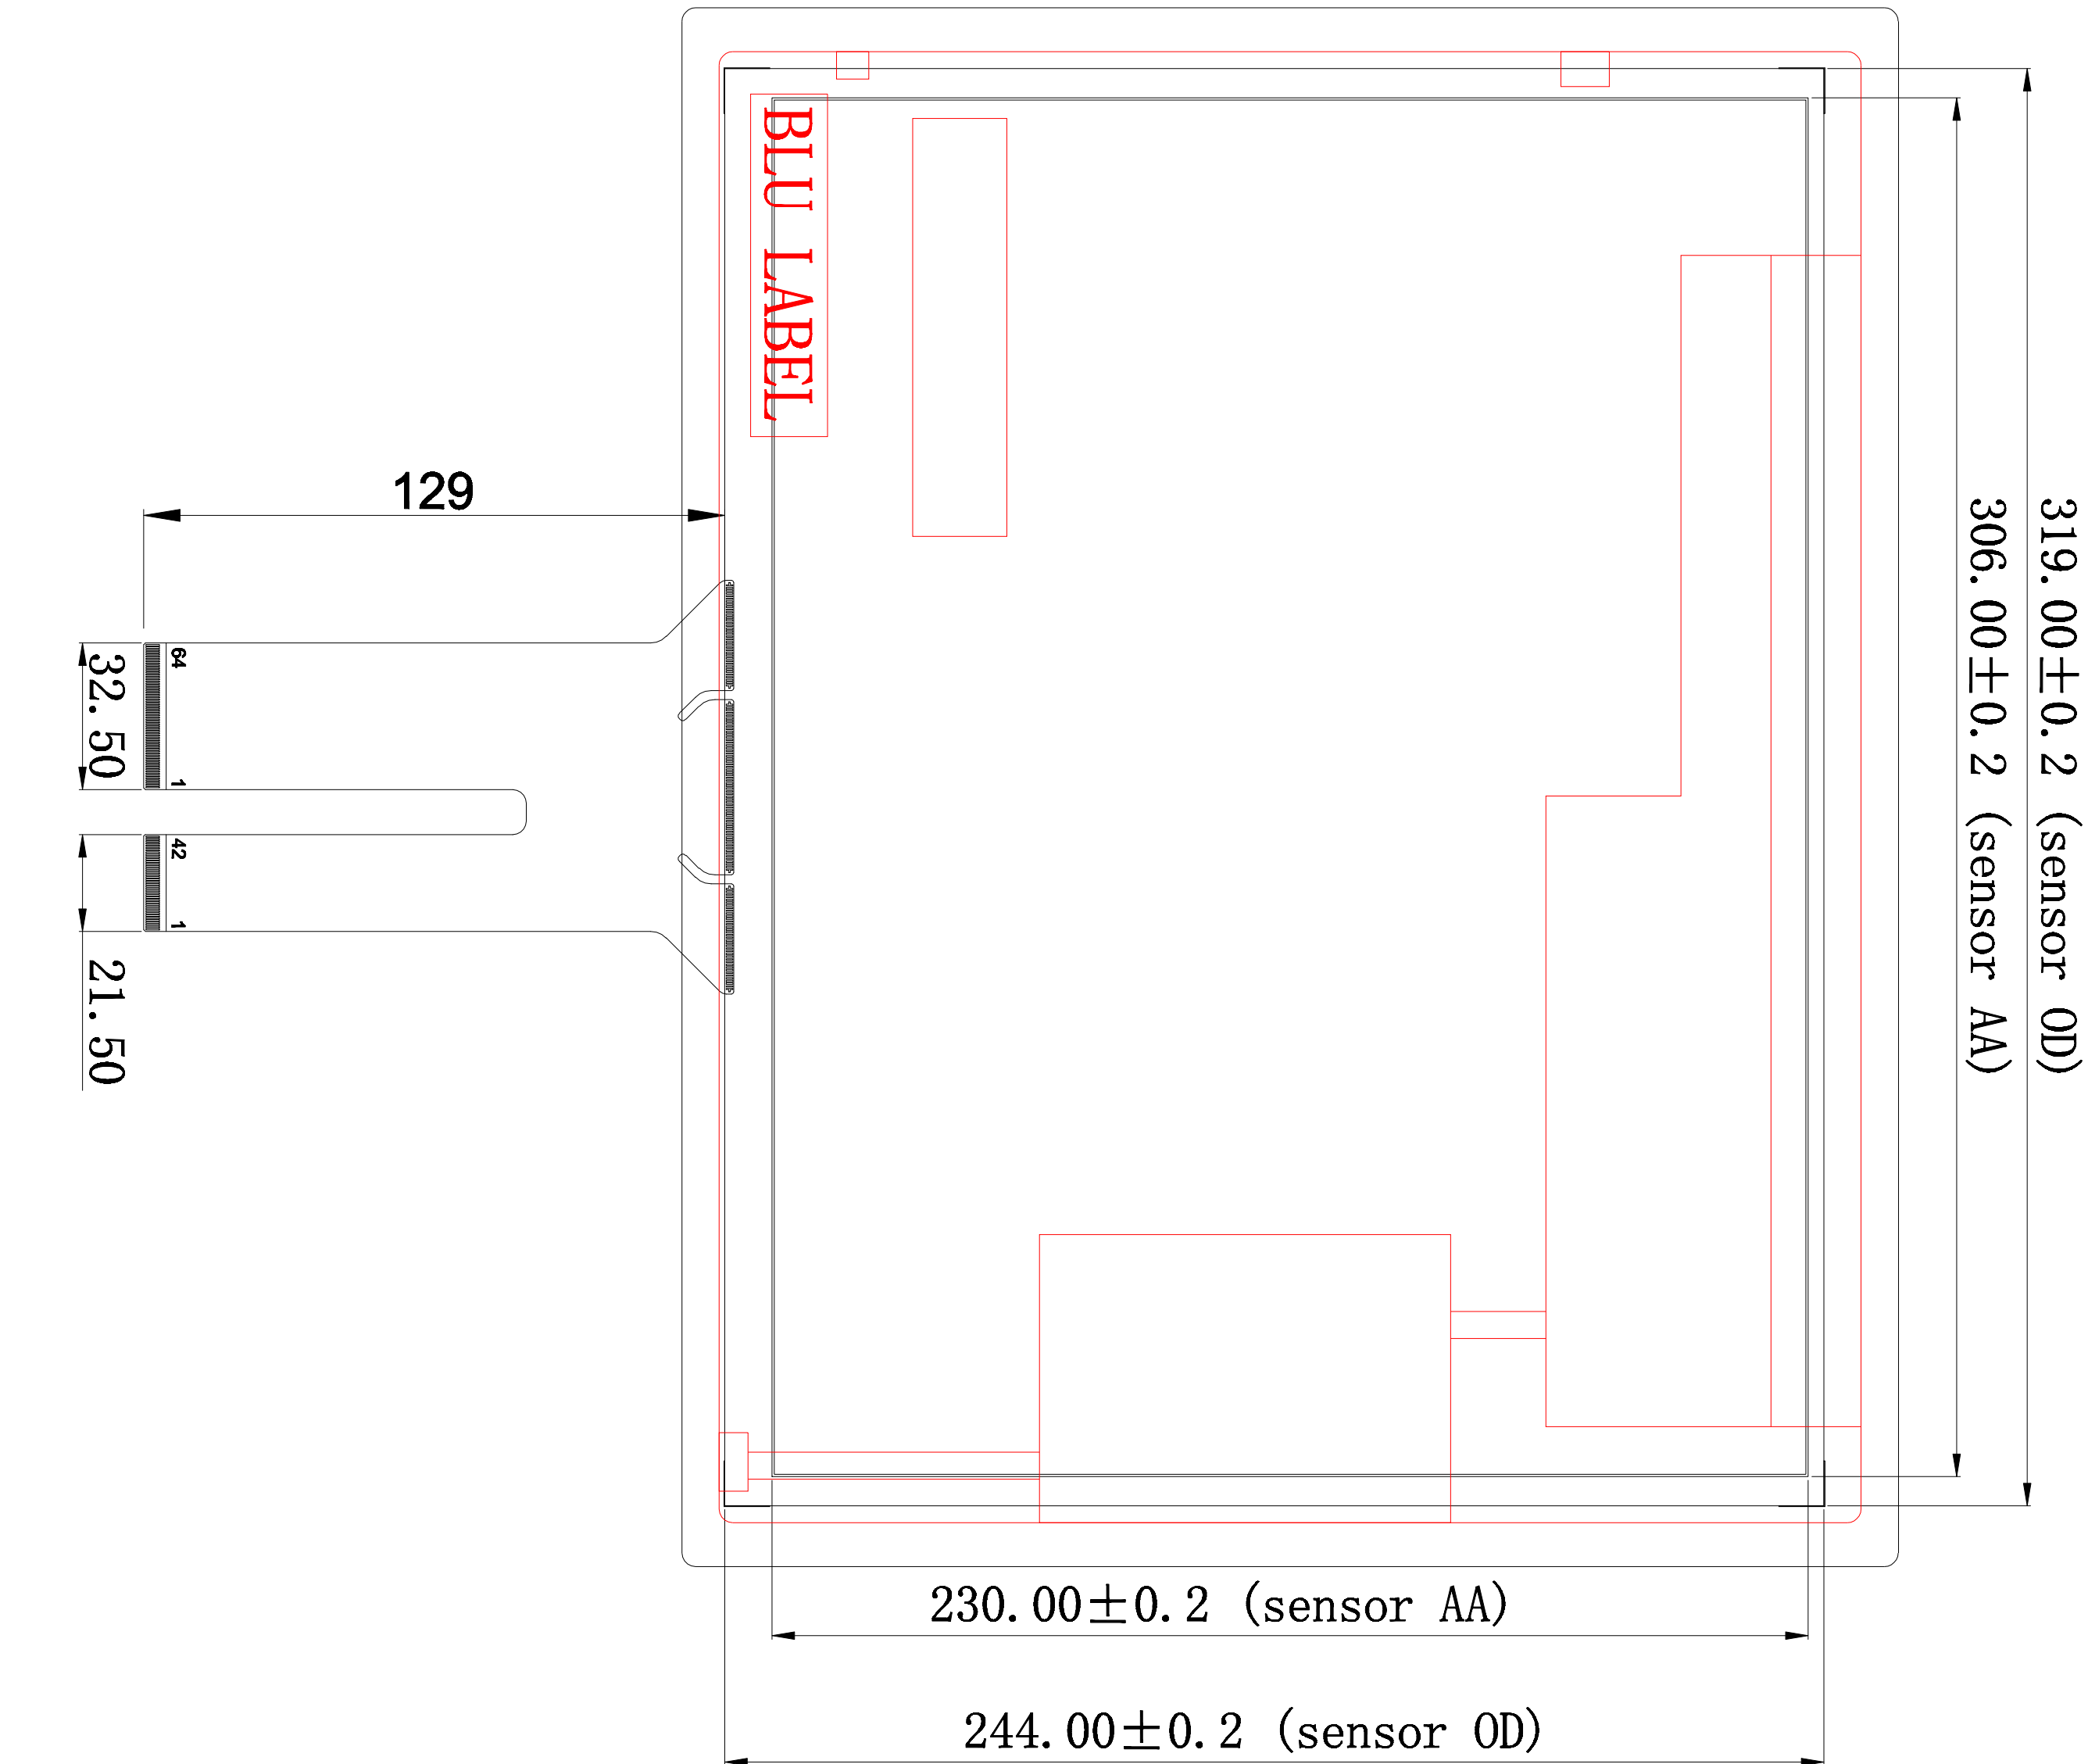
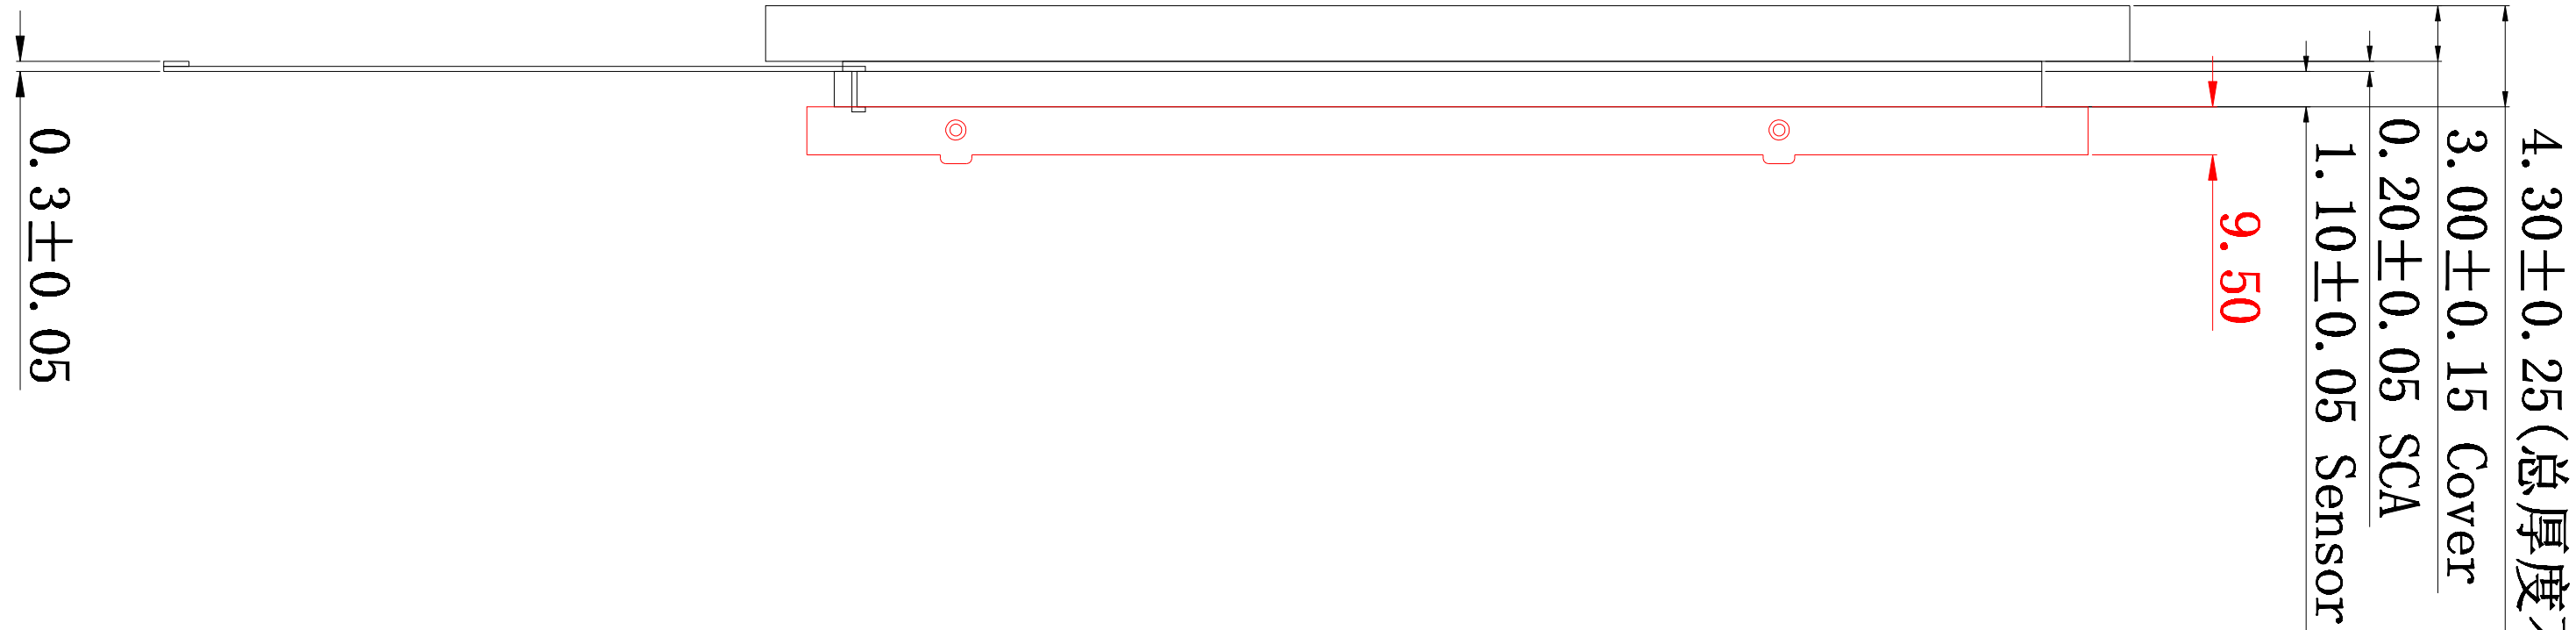


文件编号:

前视图 1:1

侧视图 横向10:1

后视图 1:1

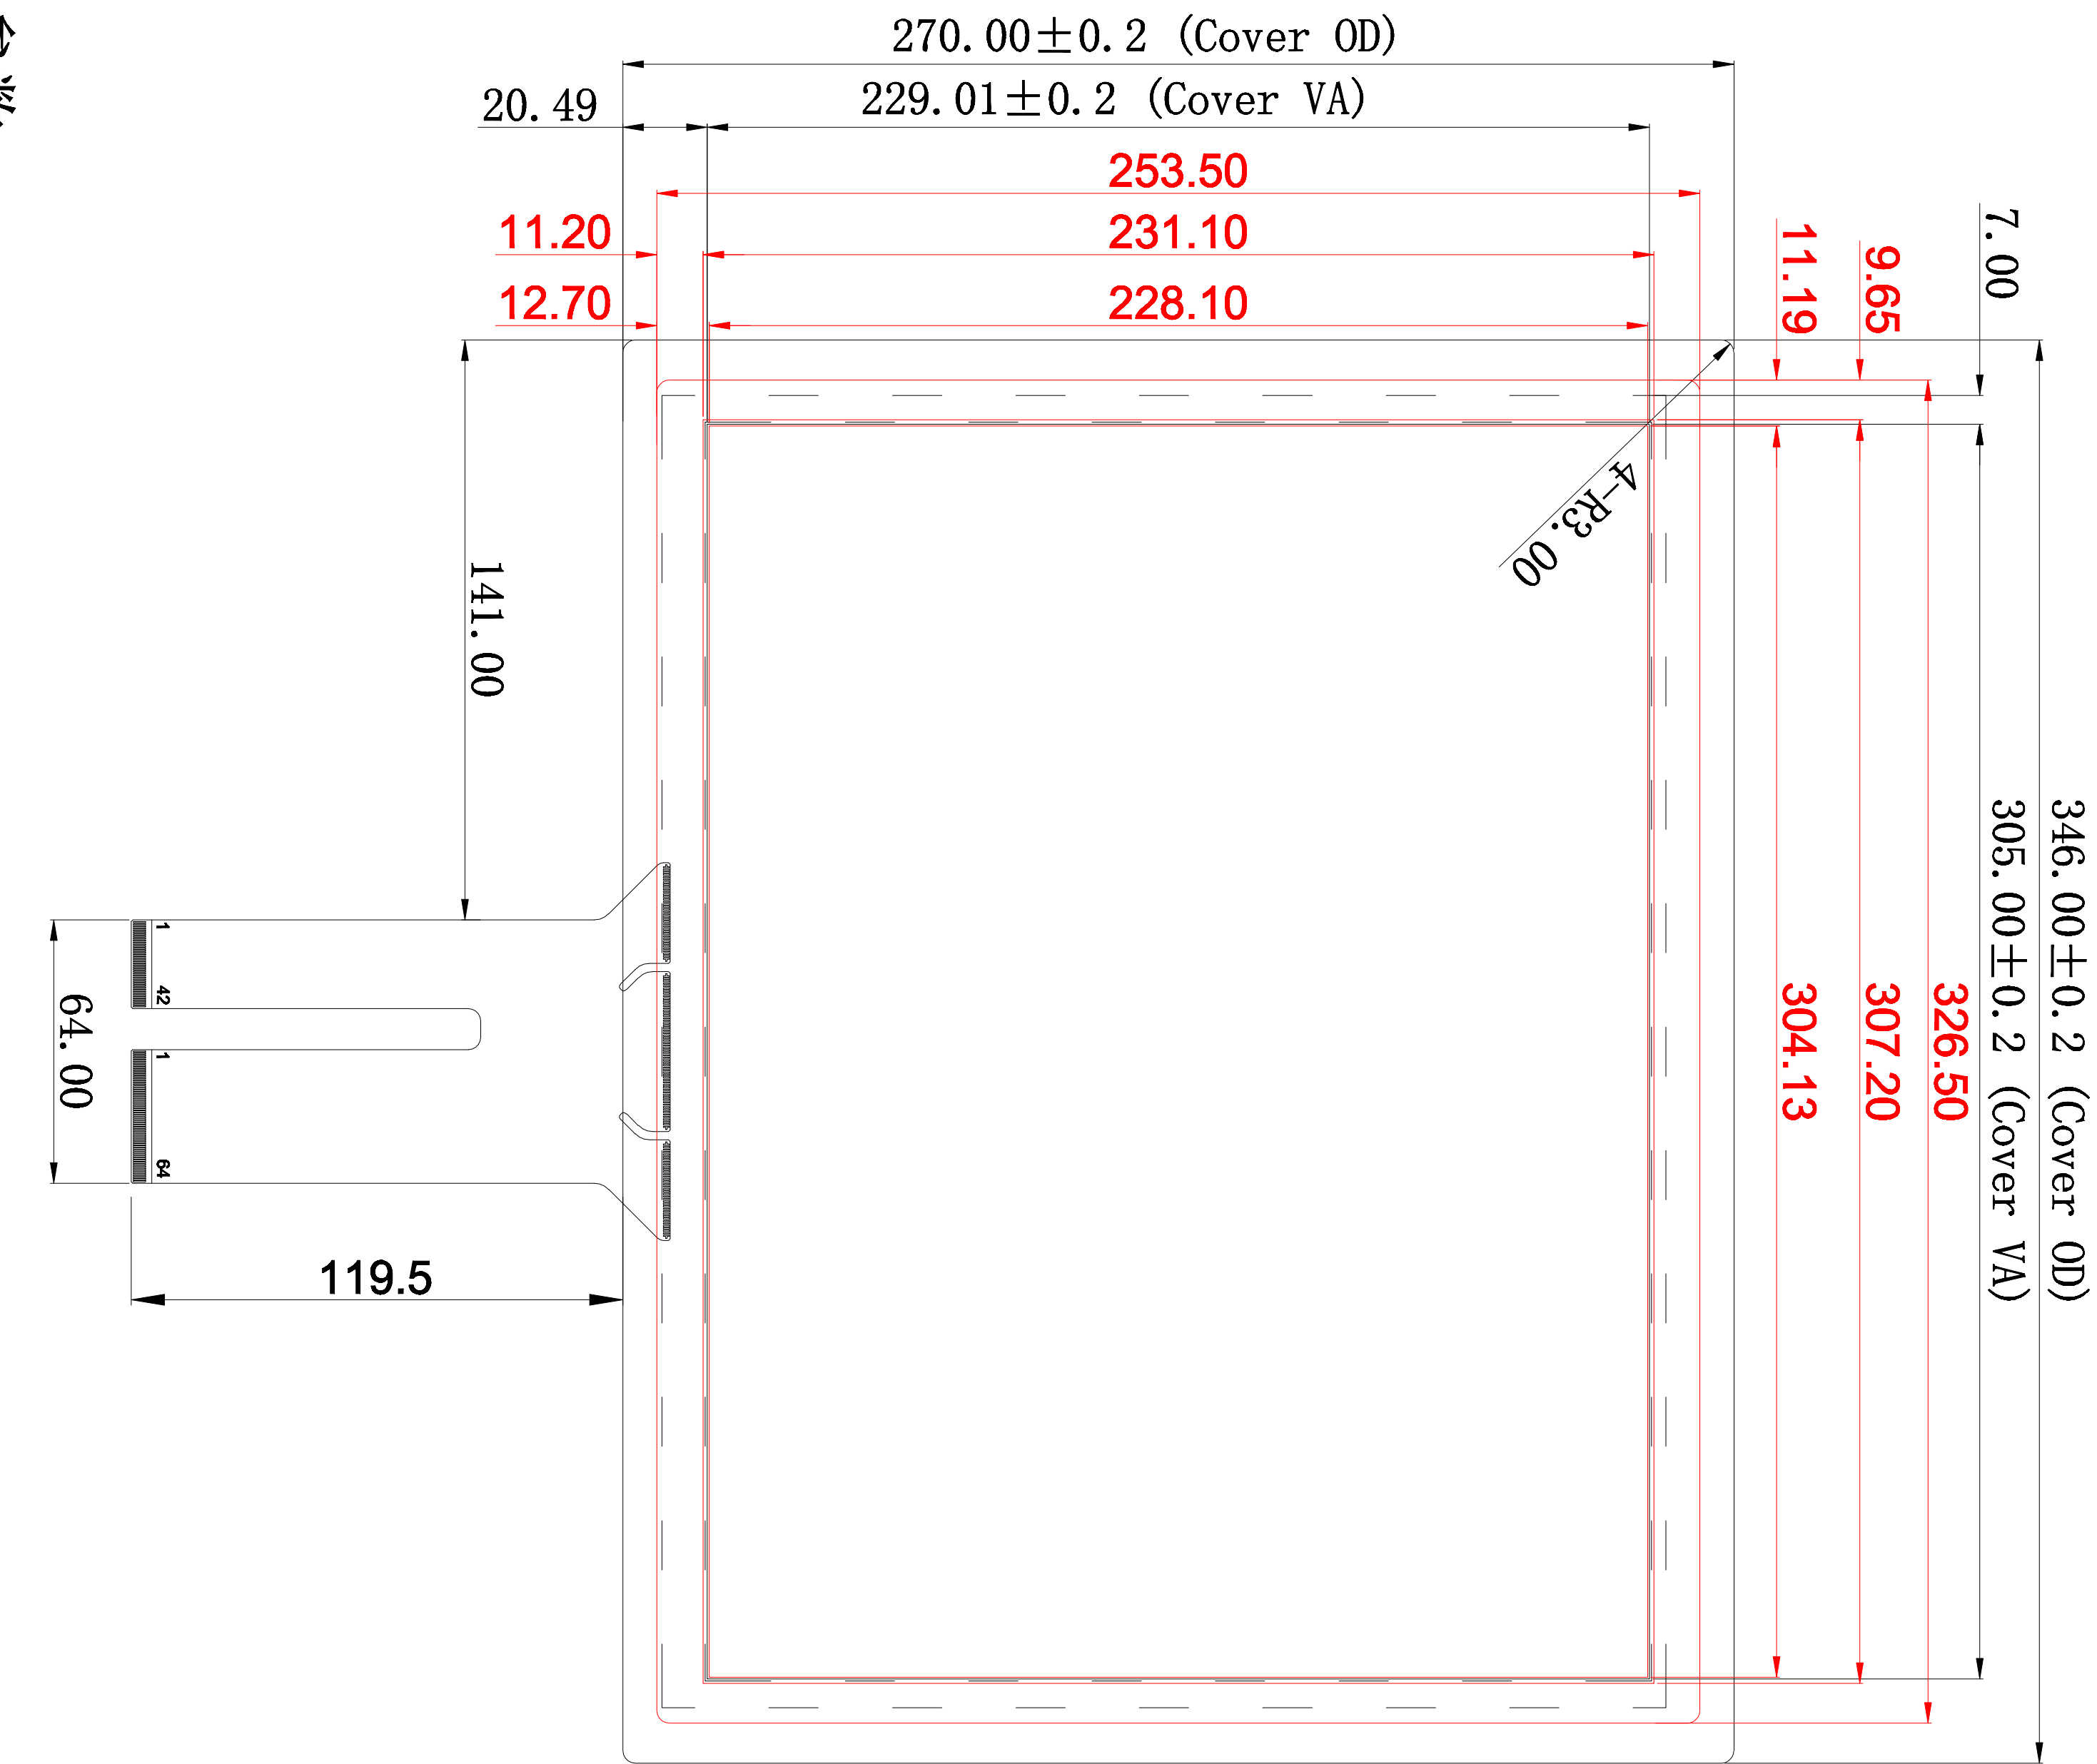

技术参数:

- 1. Cover GLASS+ITO GLASS+SCA+FPC
- Cover GLASS:3.0mm
- ITO GLASS: 1.1mm
- SCA: 0.2mm
- 总厚度: 4.3±0.25mm (不含液晶)
- SENSOR 工艺:黄光ITO;激光银浆
- 2. 工作电压: 5V/3.3 V
- 3. 透光率: ≥85%
- 4. 表面硬度: 6H
- 5. 工作环境: -20℃~+70℃, ≤90%RH
- 6. 储存环境: -30℃~+80℃, ≤90%RH
- 7. 未注尺寸公差按±0.2mm
- 8. 通讯接口: USB

USB	
PIN	Definition
1	VCC
2	D-
3	D+
4	GND

客户确认签字:

GreenTouch Technology Co.,Ltd			
DRAWN BY: 李俊		PRODUCT MODEL: GT-CTP-Y150E-2	
CHECKED BY: 邓福生		CUSTOMER ID: 客户编号:	
APPROVED BY: 付作书		DATE: 2019-11-14	
批 准: 付作书		日 期: 2019-11-14	
Standard tolerance: 公差:		WEBSITE: 网 址:	
VIEW: 第三角投影法		UNITS 单位: mm	
SCALE 比例: 1:1			