
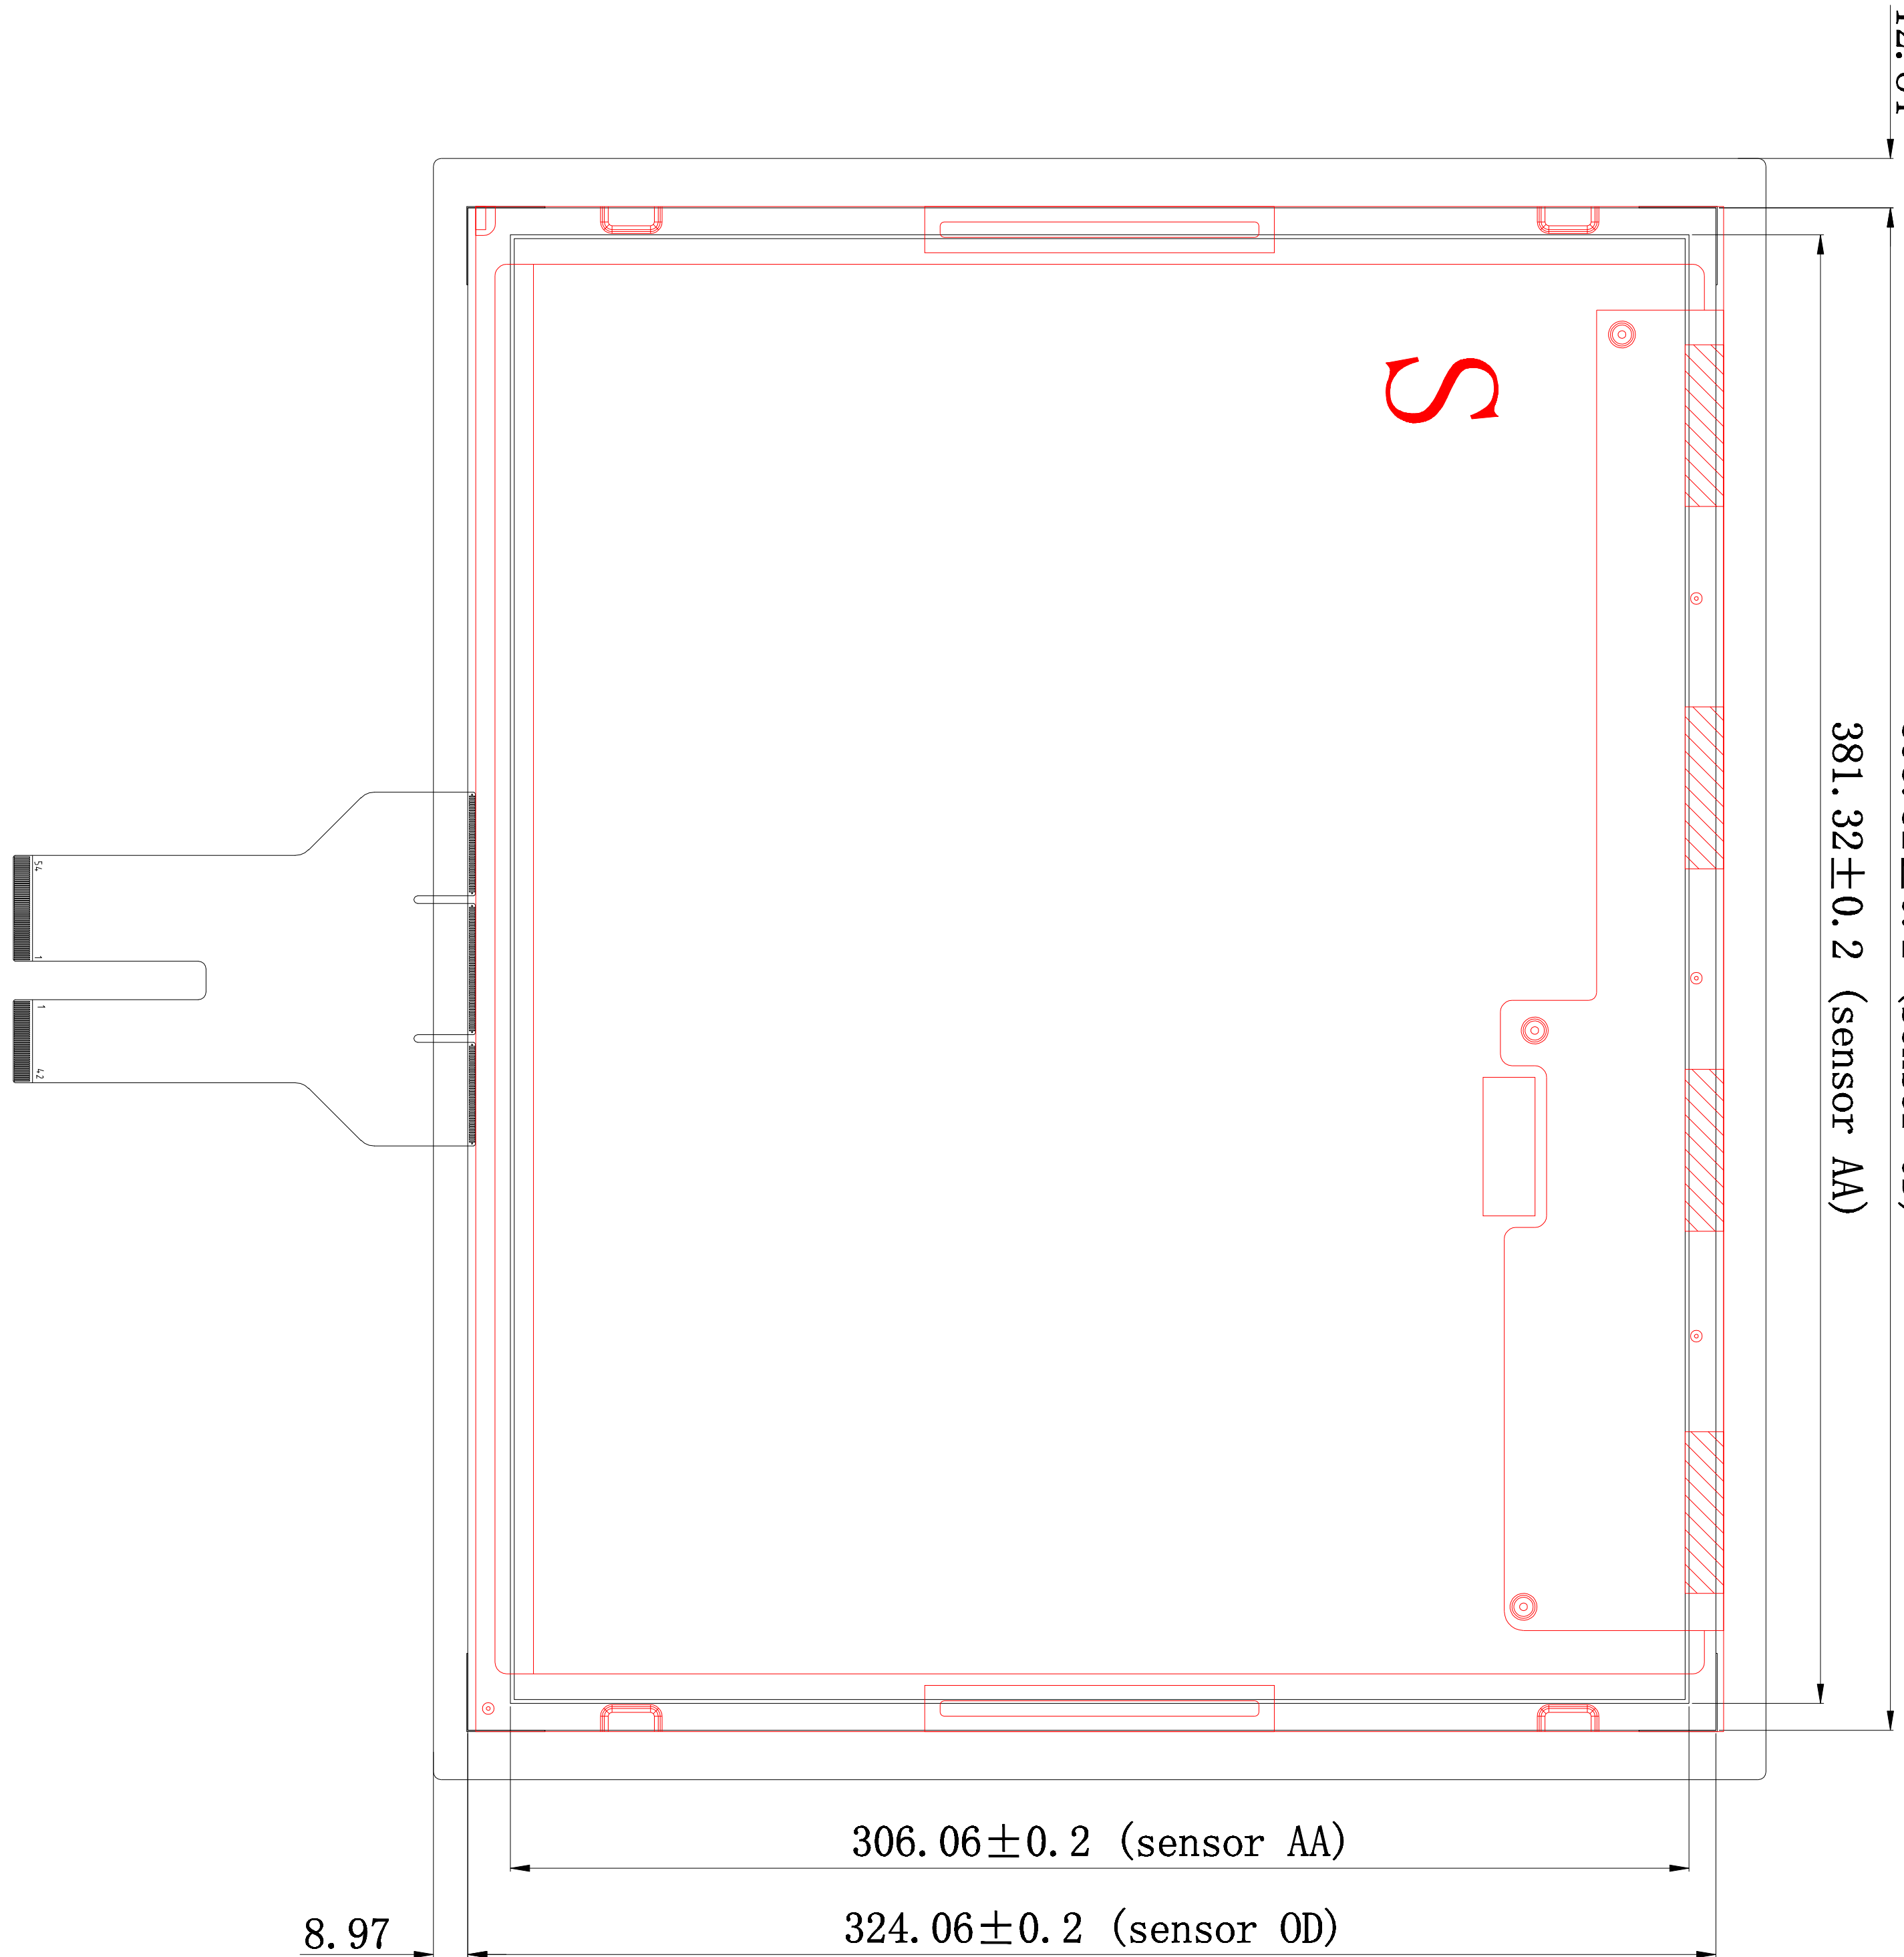
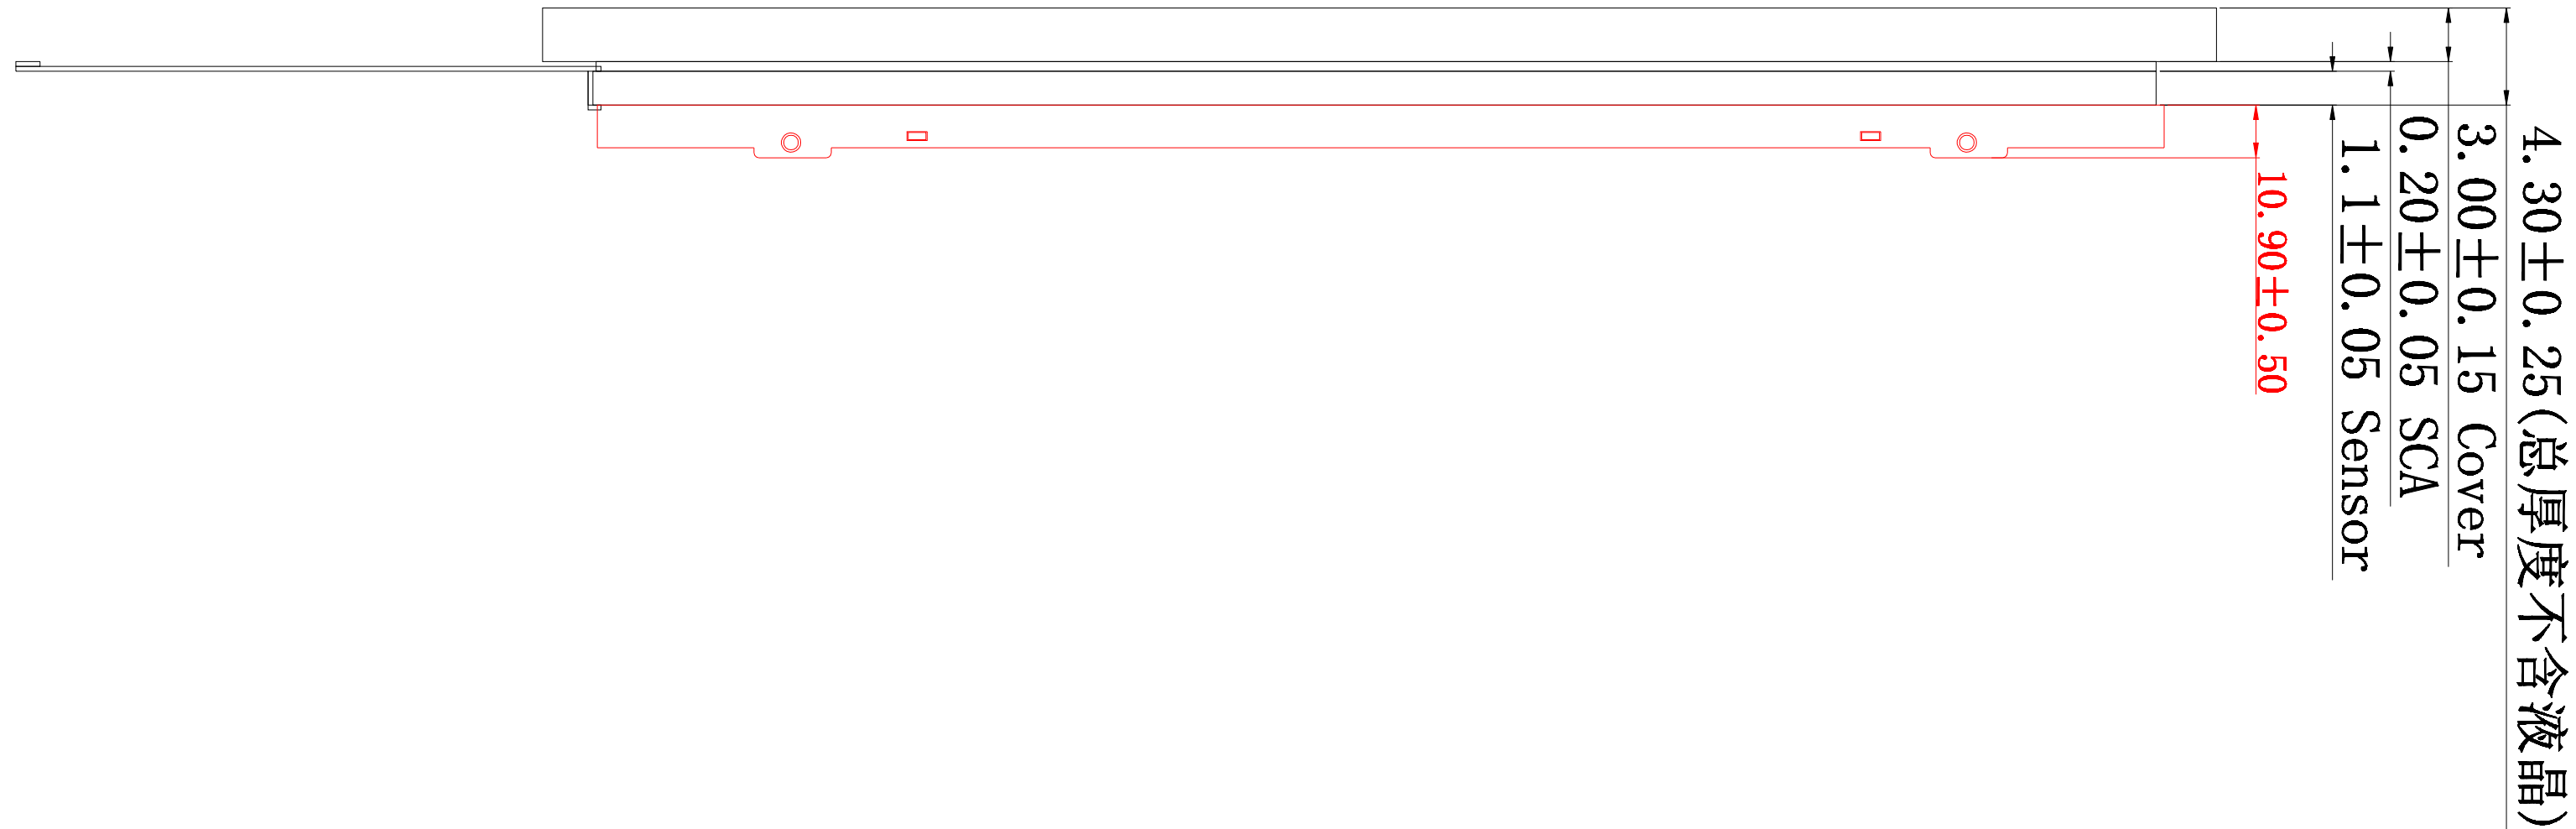


文件编号:

前视图 1:1

侧视图 横向10:1

后视图 1:1

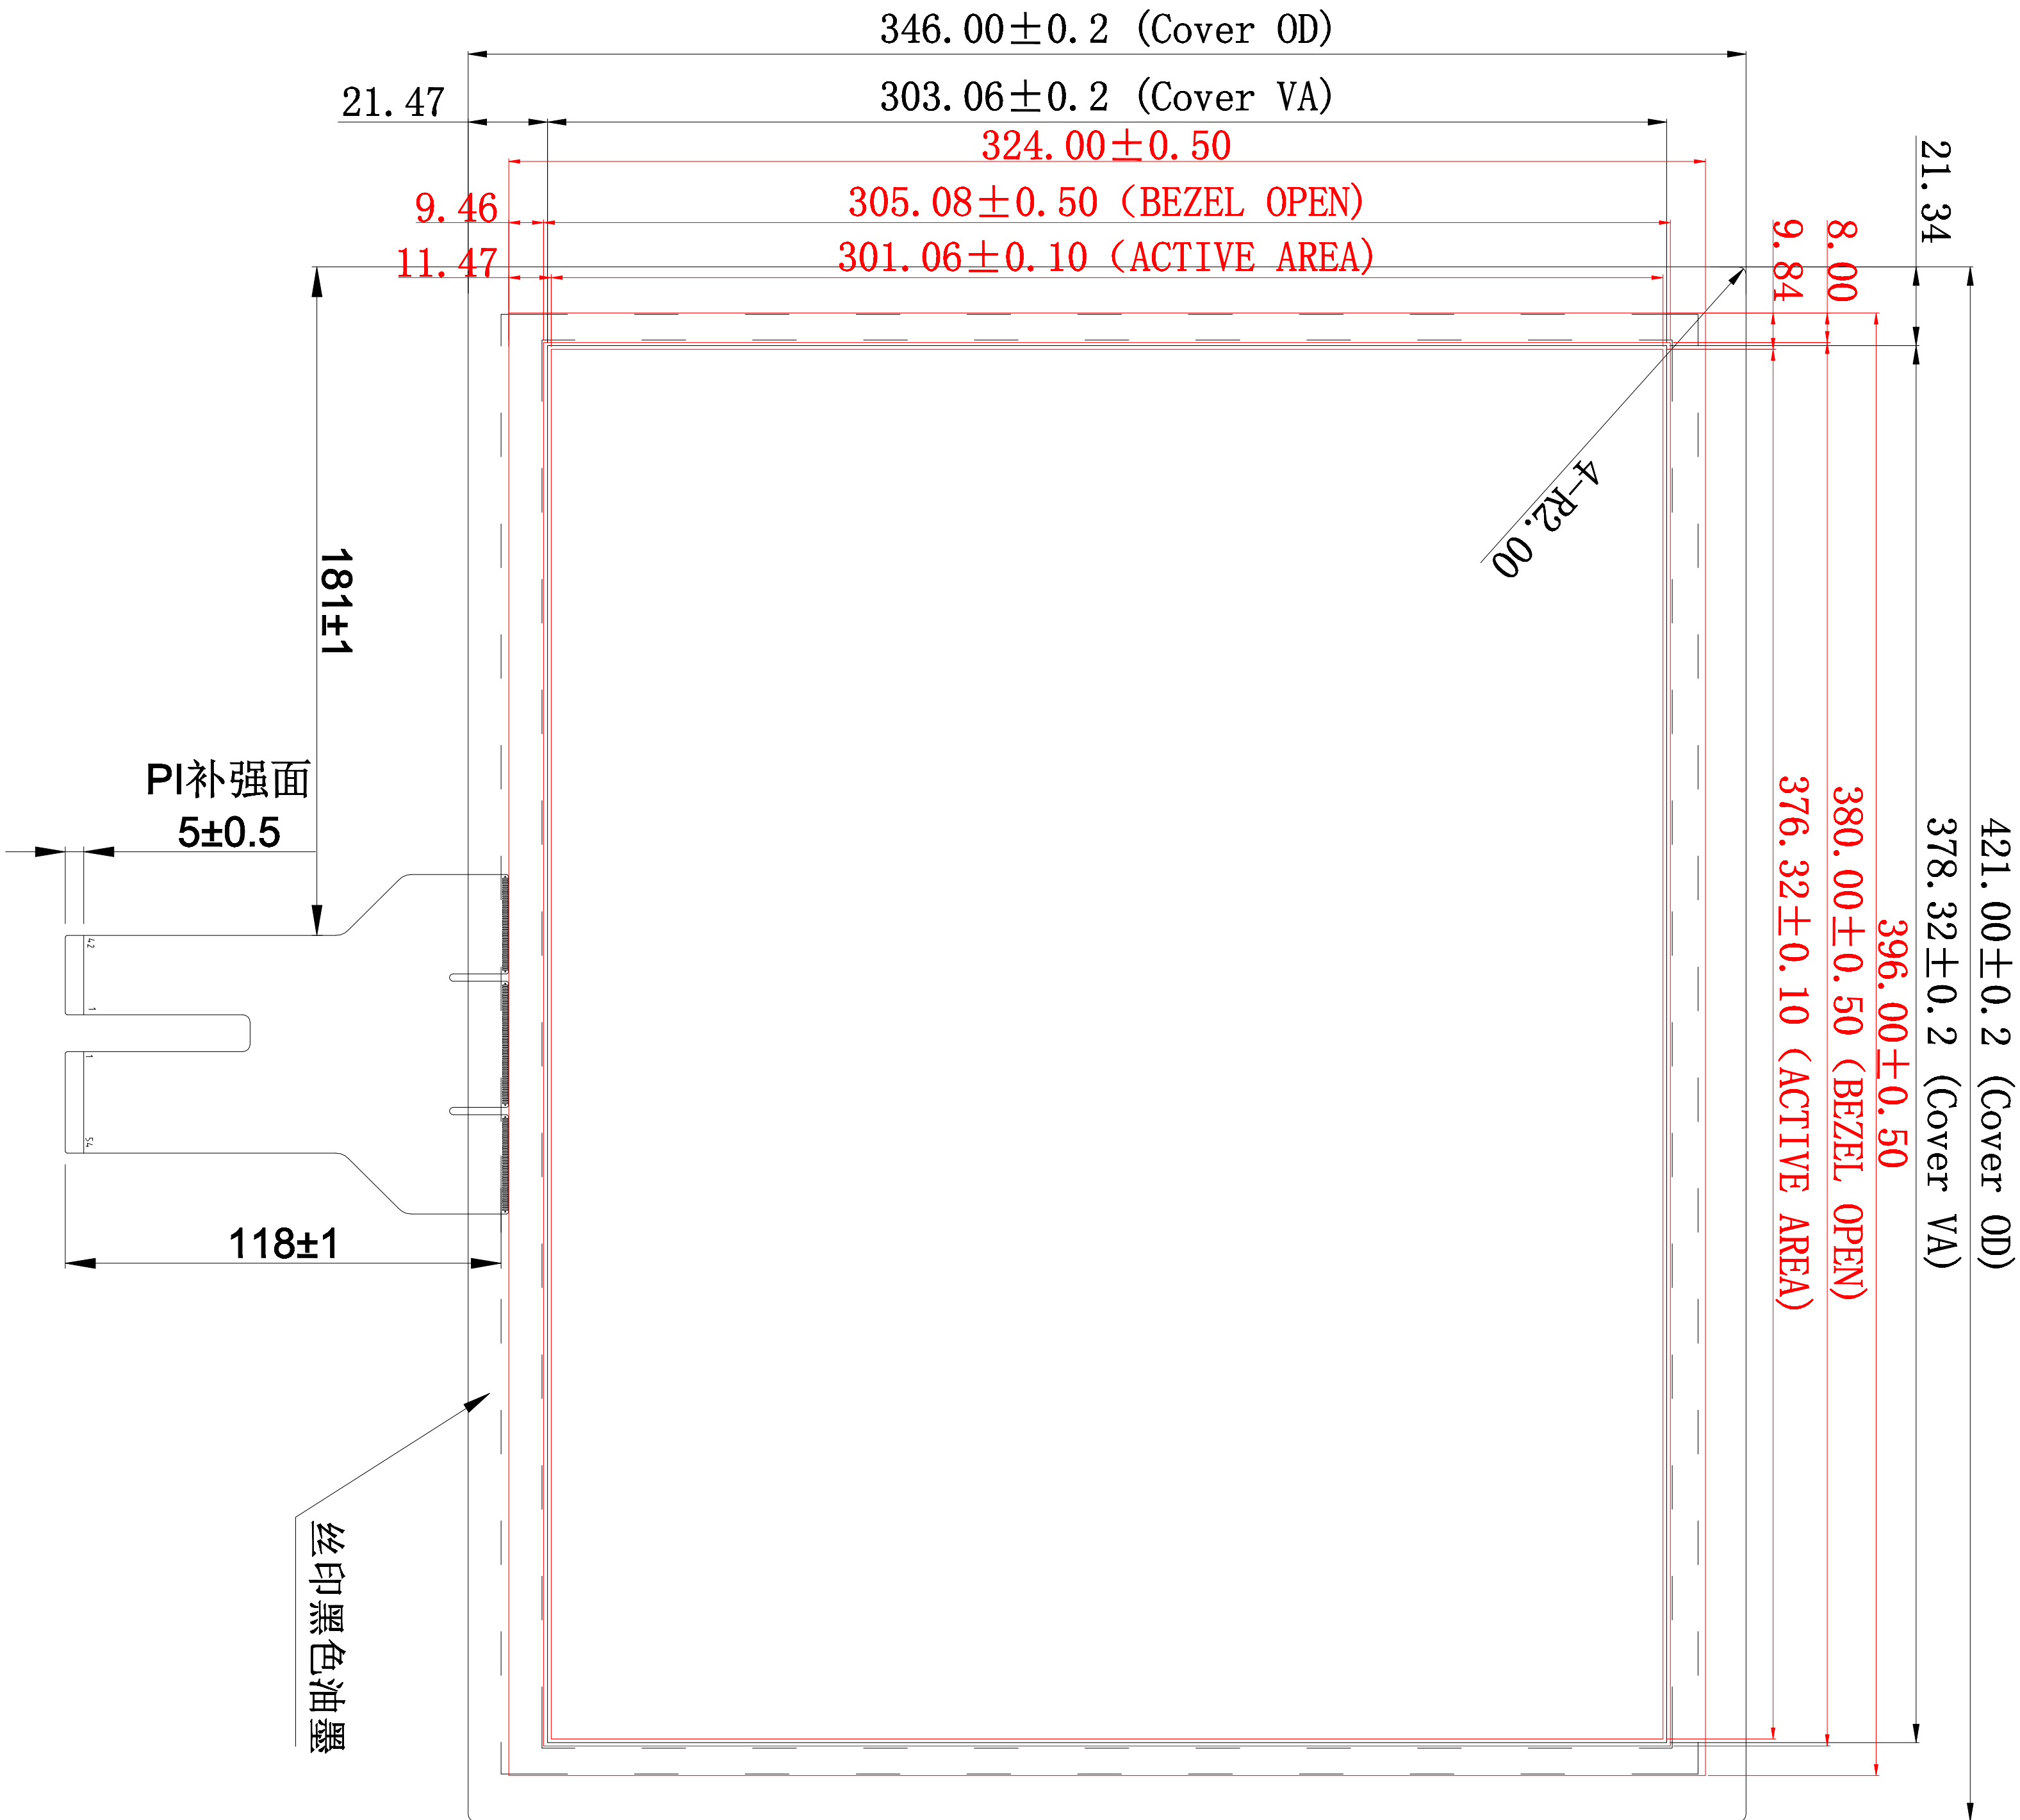


技术参数:

- 1. Cover GLASS+ITO GLASS+SCA+FPC
- Cover GLASS:3.0mm
- ITO GLASS: 1.1mm
- SCA: 0.2mm
- 总厚度: 4.3±0.25mm(不含液晶)
- SENSOR 工艺:黄光ITO;激光银浆
- 2. 工作电压: 5V/3.3 V
- 3. 透光率: ≥85%
- 4. 表面硬度: 6H
- 5. 工作环境: -20℃~+60℃, ≤90%RH
- 6. 储存环境: -30℃+70℃, ≤90%RH
- 7. 未注尺寸公差按±0.2mm
- 8. 通讯接口: USB

| USB |            |
|-----|------------|
| PIN | Definition |
| 1   | VCC        |
| 2   | D-         |
| 3   | D+         |
| 4   | GND        |

客户确认签字:

| GreenTouch Technology Co.,Ltd |  |                               |  |
|-------------------------------|--|-------------------------------|--|
| DRAWN BY: 李俊                  |  | PRODUCT MODEL: GT-CTP-Y190E-3 |  |
| CHECKED BY: 邓福生               |  | CUSTOMER ID: 客户编号:            |  |
| APPROVED BY: 付作书              |  | DATE: 2019-09-9               |  |
| 批 准: 网 址:                     |  | WEBSITE: 网 址:                 |  |
| Standard tolerance: 公差:       |  | SCALE 比例: 1:1                 |  |

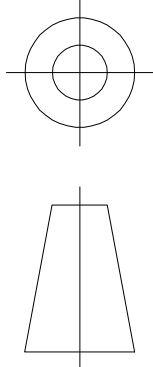

投影方式: 第三角投影法

UNITS 单位: mm