
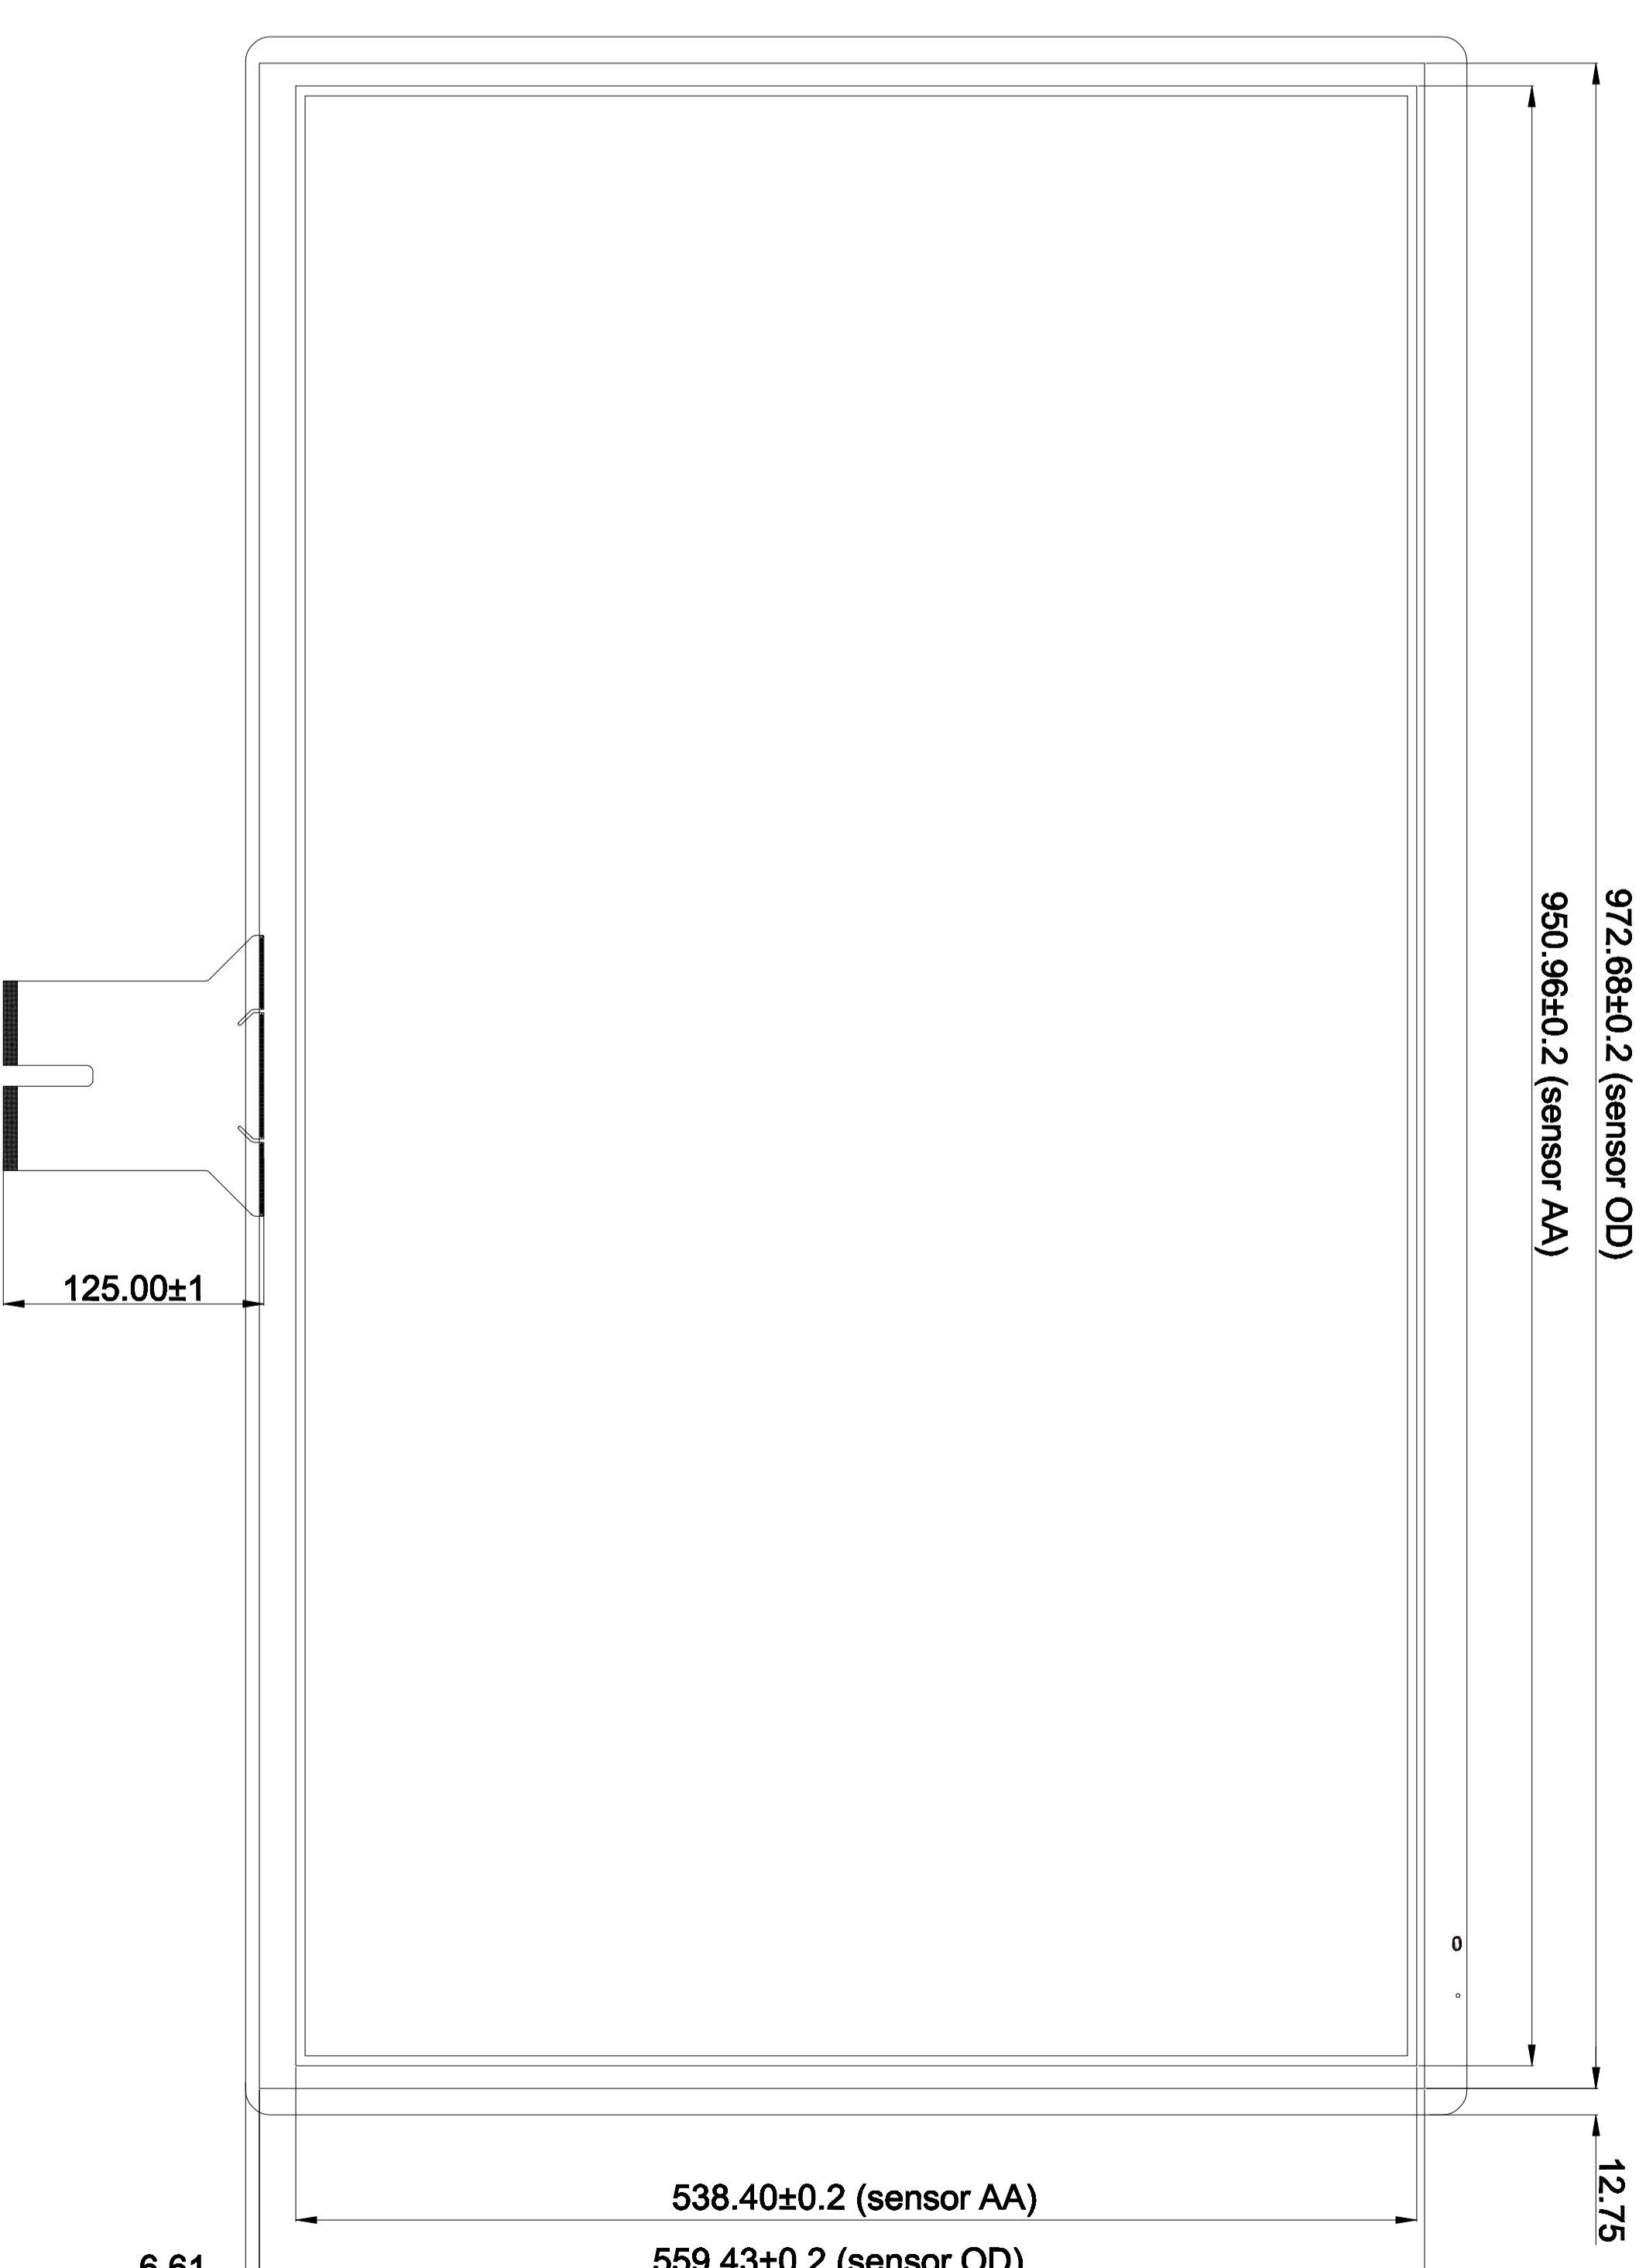


文件编号:

前视图 1:1

侧视图 横向10:1

后视图 1:1

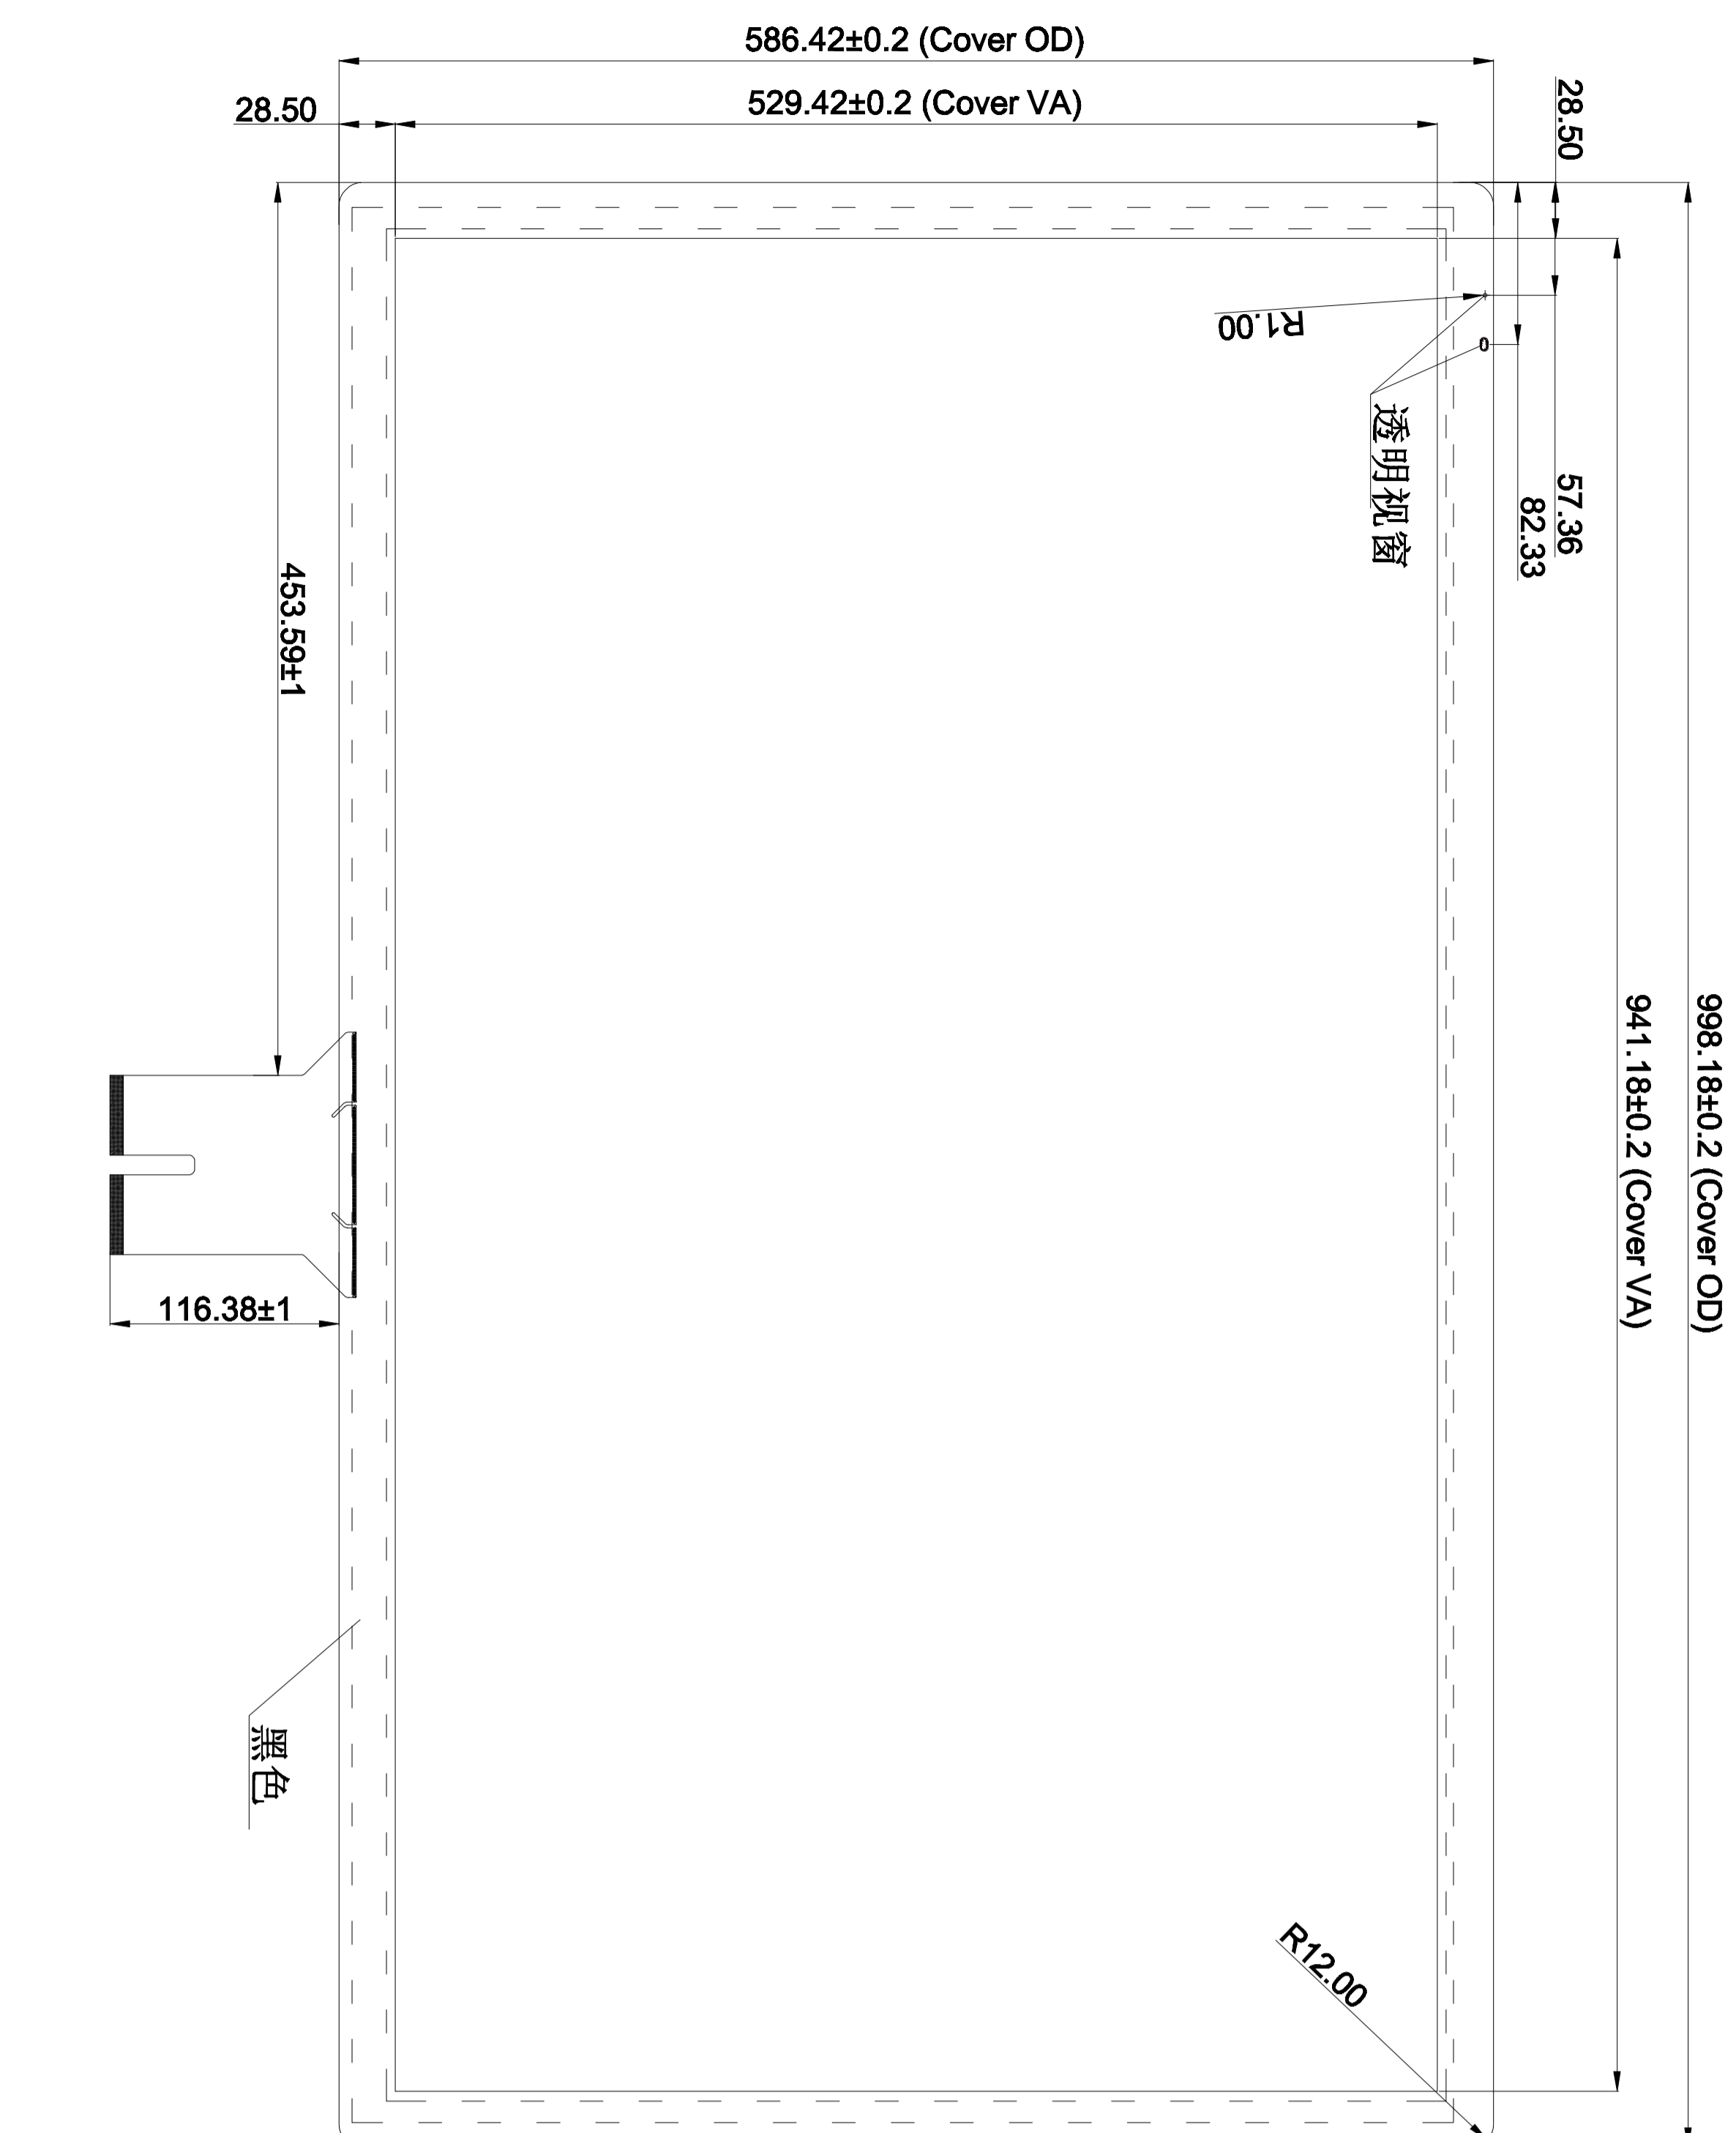

技术参数:

1. Cover GLASS+ITO GLASS+SCA+FPC
Cover GLASS: 3.0mm
ITO GLASS: 1.1mm
SCA: 0.25mm
总厚度: 4.35±0.2mm
2. 工作电压: 5V
3. 透光率: ≥85%
4. 表面硬度: 6H
5. 工作环境: -10℃~+60℃, ≤85%RH
6. 储存环境: -20℃~+70℃, ≤85%RH
7. 未注尺寸公差按±0.2mm
8. 通讯接口: USB
9. 通道数 **RX96*TX54**, **菱形图案**, **奕力2315或者2323C3.P2.V1**

1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8

USB	
PIN	Definition
1	VCC
2	D-
3	D+
4	GND

客户确认签字:

GreenTouch		GreenTouch Technology Co., Ltd	
DRAWN BY: 李俊	PRODUCT MODEL: GT-CTP-Y430S-2	VIEW:	投影方式: 第三角投影法
CHECKED BY: 邓福生	CUSTOMER ID:	UNITS: mm	SCALE: 1:1
APPROVED BY: 付作书	DATE: 2022-11-02		
批 准: 付作书	日期: 2022-11-02		
Standard tolerance: 公差:	网 址:		