

## 4306C-G 43" LCD advertising machine

GreenTouch's 6C-G advertising machine, with low power consumption, ultra-thin body design, compared to ordinary monitors, 6C-G series of professional design and High performance is more suitable for applications in retail and other industries. Designed and built by GreenTouch, this model has a long life cycle and can supply long-term needs.

This model is versatile and powerful, with modular design and optional configuration. For customers with low performance requirements, the ultra-low power consumption and cost-effective INTEL J1900 solution is recommended; for customers with high performance requirements, the optional performance is more powerful. The core series I3/I5/I7-U solution, onboard Intel HD graphics and onboard audio decoding, optional memory size, built-in SSD solid state drive, can be used with a second 2.5-inch hard drive to increase storage capacity; Antenna WiFi, Built-in speaker.

The All-in-One comes with a range of input/output connections to support a variety of third-party peripherals. Standard ports include 4 USB ports, Gigabit wired network card interface and 1 set of 3.5MM audio input ports and 1 set of audio output ports, 1 VGA and 1 HDMI video output port, which is convenient for adding Second officiant.

This model has global regulatory agency certification, as well as GreenTouch's warranty and after-sales service. It provides a cost-effective all-in-one solution for industrial embedded system integrators and value-added resellers (VARs).


## Features

- Motherboard Configuration includes:  
Intel Celeron J1900;  
Intel Core series;  
Intel Core I3-U  
Intel Core I5-U  
Intel Core I7-U

- Simple appearance and easy integration  
You can choose VESA installation

- Easy to integrate, low maintenance
- excellent performance
- reliability

- Worldwide agency approvals
- One year standard warranty

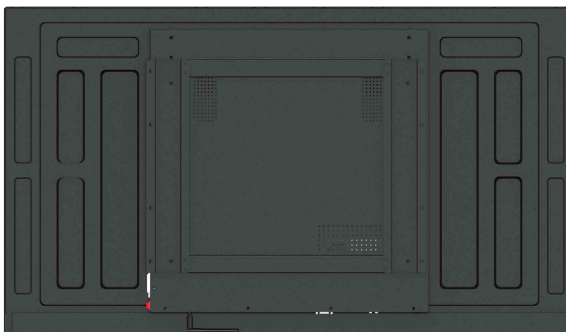

## Ordering Information

Model	Part Number	CPU	RAM	Storage	Surface Treatment	Availability
GT-0C4306C-G	GT-0C4306C-G-I34030U-D4G5128G	Intel Core i3	4G	128G	Clear	Worldwide

To find out more about our extensive range of GreenTouch touch solutions, go to [www.greentouch.com.cn](http://www.greentouch.com.cn), or [ifo@greentouch.com.cn](mailto:ifo@greentouch.com.cn)

Service call: +86-755-29370883/29371519

Shenzhen GreenTouch Technology Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. GreenTouch (logo) and Shenzhen GreenTouch Technology Co., Ltd. Copyright . All rights reserved.

2016 Shenzhen GreenTouch Technology Co., Ltd. All rights reserved.

- “Design for simple and convenience” the idea
- Outstanding quality, reliability and Cost-effective

## About GreenTouch

Shenzhen GreenTouch Technology Co., Ltd. is a professional manufacturer of product. Our company specializes in R&D, manufacture and marketing of high-grade touch screen and value-added touch machine. Our company has our own brand—GreenTouch and provides customers with touch products including SAW touch screen, IR touch screen, four-wire touch screen, five-wire touch screen, various touch screen monitors and touch all in one PC TV. GreenTouch has automatic production lines and the sealed dust-free workshops and has been certified to ISO9001 Quality Management System. The products are inspected in strict accordance with the quality management system. Quality management becomes an essential part of operation. Our products have been certified to CE, FCC, ROHS. The objective of GreenTouch is to become the most reliable supplier of touch screen, high value-added and special touch products and touch solutions in the world.

## Applications

- retail terminal
- Rail transit
- Finance and other industries
- self service

## Specifications

Case/ frame color	Black
Machine dimensions	967.6mm(W) x555.8mm(H), Thickness:59mm
Display type	43.0" Diagonal, Ratio 16:9, Active matrix TFT LCD, LED backlight
Resolution(pixel)	1920 x 1080 @ 60Hz
Active Area Dimensions	940.896mm(H) x529.254mm(V)
Display Colors	16.7M, 90% NTSC
Brightness (Standard)	450 cd/m <sup>2</sup>
Response time (standard)	6ms
View Angle(from center)	Horizontal (left / right): ±89° or a total of 178° Vertical (up / down): ± 89° or a total of 178°
Contrast ratio (standard)	4500:1(Typ.)
Motherboard	Intel Core I3-4030U
Graphics	Onboard Intel HD graphics
Sound Card	Onboard Realtek ALC662HD audio decoding
RAM	4GB
SSD	128G
HDD	NA
Wifi	Built-in 802.11b / g / n wireless, external two 3DB omnidirectional antenna
Speakers	Built-in 2" 10W speakers
Extra Video output	1" VGA; 1" HDMI
USB interface	4" USB TYPE-A
Network card	1 road onboard Realtek 8111e Gigabit
Audio Interface	1" 3.5mm Audio input; 1" 3.5mm Audio output
Power	External AC, input voltage-AC: 100-220VAC 50HZ-60HZ; input power connector specification (on the all-in-one machine)-type: pin suffix socket
Power consumption (standard)	Depend on Motherboard and the minimum is 200W
operating system	Windows 10 English system
Temperature	Operating: 0°C to 50°C; Storage: -20°C to 60°C
Humidity	Operating: 10% to 80% (no condensation); Storage: 10% to 80% (non-condensing)
Warranty	1 year
Weight (approx.)	Net weight: 19 kg(Typ.); Shipping: 20 kg (reference)
Mounting options	400mm x 300mm
Surface treatment	AG (MR Optional)
Agency Approvals	FCC, CE, CB, China RoHS CQC