
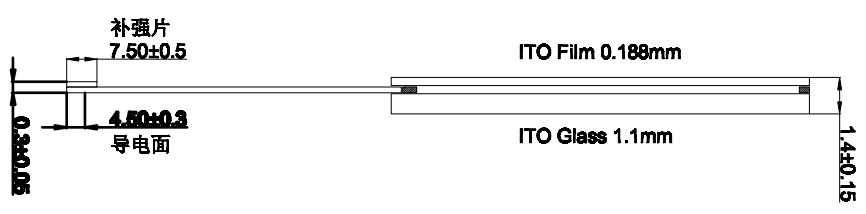
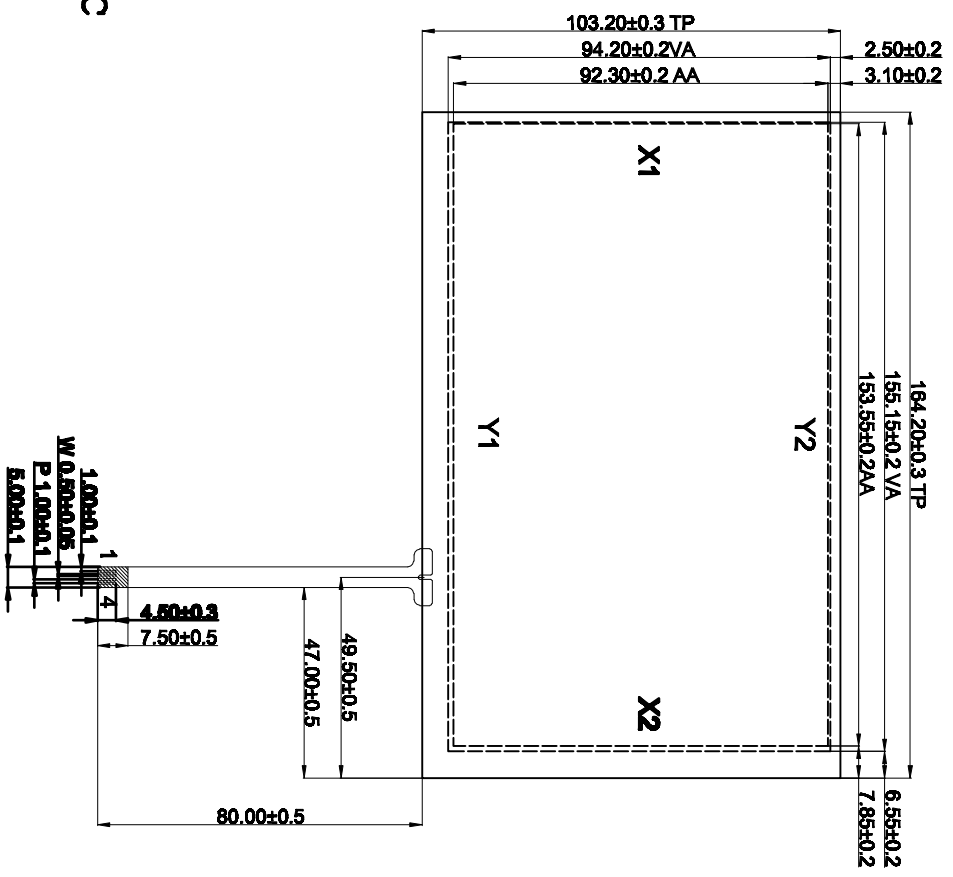


版本	变更原因	日期	姓名
----	------	----	----

# Logic:

Pin#	Assignment
Pin1	X1
Pin2	Y1
Pin3	X2
Pin4	Y2



## Notes:

1. Type: Film to Glass
2. Operating Voltage: ≤5V
3. Operation Temperature: -20℃ ~ 70℃  
Storage Temperature: -40℃ ~ 80℃
4. Life Time: 1,000,000 times
5. Connect Material: FPC
6. Response Time: ≤10ms
7. Linearity: ≤1.5%
8. Transmittance: ≥75%
9. Surface Hardness: ≥3H (pencil)
10. Operation force: 30g ~ 120g
11. Resistance: X: 400Ω-1100Ω Y: 1000Ω-5000Ω

TELEVISIONS	AVAILIBL	GRAVED
1000~X	40.0000	44.5000
1000~X	40.0000	44.5000
1000~X	40.0000	44.5000
1000~X	40.0000	44.5000
1000~X	40.0000	44.5000
1000~X	40.0000	44.5000
1000~X	40.0000	44.5000
1000~X	40.0000	44.5000
1000~X	40.0000	44.5000



Shenzhen GreenTouch Technology Co., Ltd

Model No.:	GT-44-TH-1	Size	7"II	Ratio	16:9
Structure	GT	Unit	mm	Scale	1:1
Design	SH	Date	2016.12.20	Page	1/1
Check	AT	Date	2016.12.20	Version	A0
Released	SH	Date	2016.12.20		