

6507A-G 65" LCD

Glass advertising machine


GreenTouch's 6507A-G Android Glass advertising machine is equipped with a built-in information publishing system that supports remote program publishing, synchronous playback, free screen splitting, and cross regional remote management and monitoring; 28mm ultra-thin body, optional bracket, supports gravity sensing, extremely lightweight body, based on the concept of "ultra-thin body design", with the proven professionalism and reliability of GreenTouch. This model is designed and built by GreenTouch, with a long lifecycle and the ability to meet long-term demand.

This model has diverse and powerful functions, modular design, and optional configurations. For customers with high performance requirements, the ZC-3568 solution with more powerful performance can be selected. The board integrates multimedia decoding, LCD driver, Ethernet, etc HDMI、WIFI、2.4G、Bluetooth integrated, supporting the decoding of most popular video and image formats, HDMI video output, TF card and locked SIM card holder, with stronger stability, greatly simplifying the overall system design; Built in speaker.

This model is certified by a globally standardized organization, as well as GreenTouch's warranty and after-sales service.

Features

- Optional Motherboard Configuration includes: ZC-3568
- Compact and easy to integrate with mounting from sides or top and bottom; also a VESA mount option
- Worldwide agency approvals
- One year standard warranty

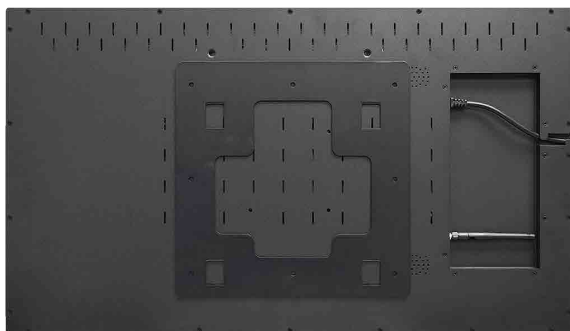

- "Design for simple and convenience" the idea
- Outstanding quality, reliability and Cost-effective

About GreenTouch

Shenzhen GreenTouch Technology Co., Ltd. is a professional manufacturer of product. Our company specializes in R&D, manufacture and marketing of high-grade touch screen and value-added touch machine. Our company has our own brand—GreenTouch and provides customers with touch products including SAW touch screen, IR touch screen, four-wire touch screen, five-wire touch screen, various touch screen monitors and touch all in one PC TV. GreenTouch has automatic production lines and the sealed dust-free workshops and has been certified to ISO9001 Quality Management System. The products are inspected in strict accordance with the quality management system. Quality management becomes an essential part of operation. Our products have been certified to CE, FCC, ROHS. The objective of GreenTouch is to become the most reliable supplier of touch screen, high value-added and special touch products and touch solutions in the world.

Applications

- Information Kiosk
- Game and Entertainment
- Industrial Automation
- Self-checking service

Specifications

| | |
|------------------------------|--|
| Case/ frame color | Tempered glass panel+metal shell/black |
| Machine dimensions | 1477.48mm(W) x852.52mm(H), Thickness: 28mm |
| Display type | 65" Diagonal, Ratio 16:9 |
| Resolution(pixel) | 3840 x 2160 @ 60Hz |
| Active Area Dimensions | 1427.48mm(H) x 805.52mm(V) |
| Display Colors | 1.07B, 90% NTSC |
| Brightness (Standard) | 500cd/m ² |
| Response time (standard) | 8ms |
| View Angle(from center) | Horizontal (left / right): ±89° or a total of 178° Vertical (up / down): ± 89° or a total of 178° |
| Contrast ratio (standard) | 1200: 1(Typ.) |
| cpu | RK3568 |
| Operating system | Android11 |
| Memory | 2G/4G/8G optional |
| Built in memory | 16GB/32GB/64GB optional |
| network interface | RJ45 Ethernet cable interface x 1, 10M/100M Ethernet port |
| Wireless | Supports WIFI-2.4G (expandable BT-4.0) |
| HDMI interface | HDMI input x 1 |
| USB interface | USBx2 (USB Host x 1, USB OTG x 1) |
| Surface Treatment | AG (AF/AR/mirror face optional) |
| Headset / Microphone | 3.5mm stereo headphone output x 1 |
| Audio and video output | Support left and right channel output, built-in 4R / 2W power amplifier |
| OSD language | Multi language OSD operations in both Chinese and English |
| Power | AC power: 100-240v 50/60HZ |
| Power consumption (standard) | According to the motherboard configuration, the minimum is ≤ 180W |
| Temperature | Operating: 0°C to 50°C; Storage: -10°C to 60°C |
| Humidity | Operating: 20% to 80% (non-condensing); Storage: 10% to 80% (non-condensing) |
| Warranty | 1 year |
| Weight (approx.) | Net weight: 35.3 kg(Typ.); Shipping: 41.5 kg (reference) |
| VESA | 400 x 400mm optional compatible hanger |
| Package size | 1550 x 955 x 130mm |
| Agency Approvals | FCC, CE, CB, China RoHS CQC |

Ordering Information

| Model Number | CPU | RAM | Storage | Surface Treatment | Availability |
|-----------------------------|--------|-----|---------|-------------------|--------------|
| GT-0C6507A-G-RK3568-D4GS32G | RK3568 | 4G | 32G | Clear | Worldwide |

To find out more about our extensive range of GreenTouch touch solutions, go to www.greentouch.com.cn, or ifo@greentouch.com.cn

Service call: +86-755-29370883/29371519

Shenzhen GreenTouch Technology Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. GreenTouch (logo) and Shenzhen GreenTouch Technology Co., Ltd. Copyright. All rights reserved.

2016 Shenzhen GreenTouch Technology Co., Ltd. All rights reserved.